


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

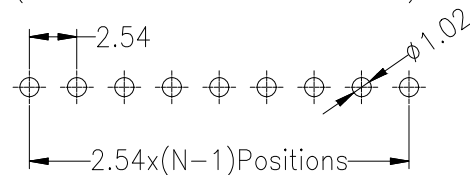

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C 5S

Pitch	塑高 (mm)
2.54mm	3.4
	3.5
	5.0
	5.7
	5.9
	6.8
	7.1
	8.0
	8.5
	11.0
	13.5

Ordering Information

PM 254 - * - N - * - * - **



No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2-40Pin

Type
2=直针
8=弯针
S=立脚
W=预弯

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

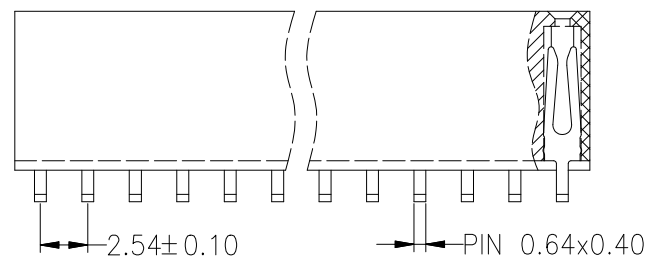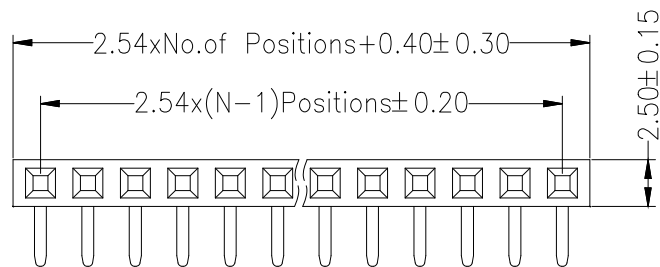

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	DRAWING				
			X. X	$\pm$ 0.30	审 核	产品名称	2.54 单排 排母 弯针	版本	A
			X. XX	$\pm$ 0.20	批 准	TITLE	塑高8.5	REV.	
			X. XXX	$\pm$ 0.10	APPROVAL	产品料号	PM254-1-N-W-8.5-XX(L10.2)	单 位	mm
			Angle	$\pm$ 3.0 $^{\circ}$	SCALE	PART NO.		UNITS	
序号	变更内容	日期	投 影		Projection	材 料		页 次	1/1
No.	MODIFY CONTENT	MODIFY DATE				MATERIAL		SHEET	