

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

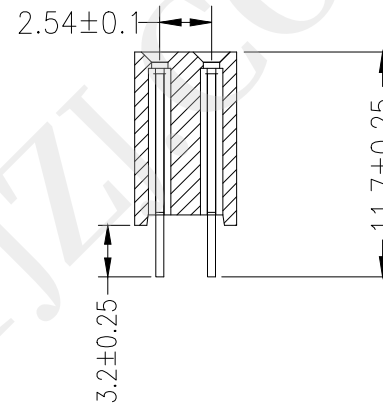
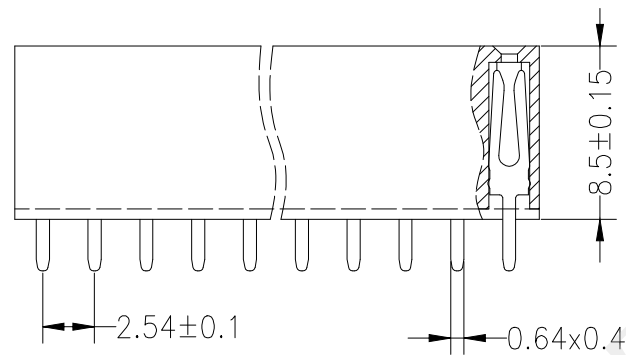
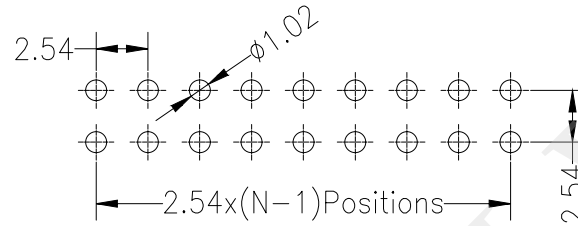
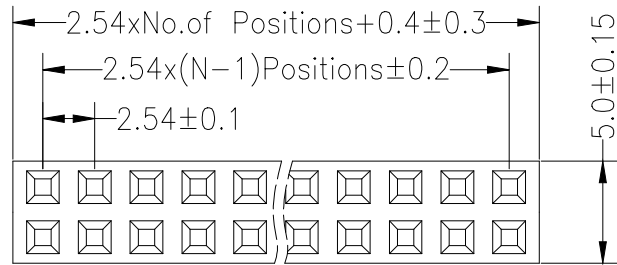
Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260°C±5°C 5S

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

PM 254 - * - N - Z - * - **						
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2-40Pin	Type 2=直针 8=弯针 S=2.54 R=异形	Length (Plastic) (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin		

GENERAL TOLERANCE			制 图	深圳市华灿天禄电子有限公司			
DIM TOL			审 核	ShenzhenhuacantianluELECTRONICS CO.,LTD			
X.X ±0.30			批 准	产品名称	2.54双排 排母 直针(塑高8.5)	版本	A
X.XX ±0.20			APPROVAL	TITLE		REV.	
X.XXX ±0.10			比 例	产品料号	PM254-2-N-Z-8.5-XX(L11.7)	单 位	mm
Angle ±3.0°			SCALE	PART NO.		UNITS	
序号	变更内容	日 期	投 影	材 料		页 次	1/1
No.	MODIFY CONTENT	MODIFY DATE	Projection	MATERIAL		SHEET	