
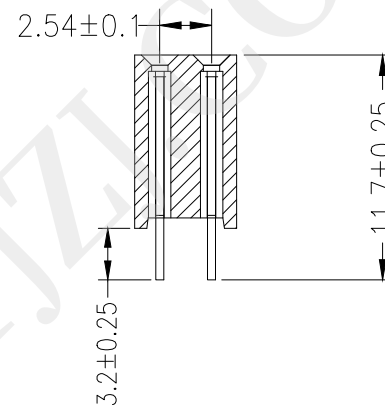
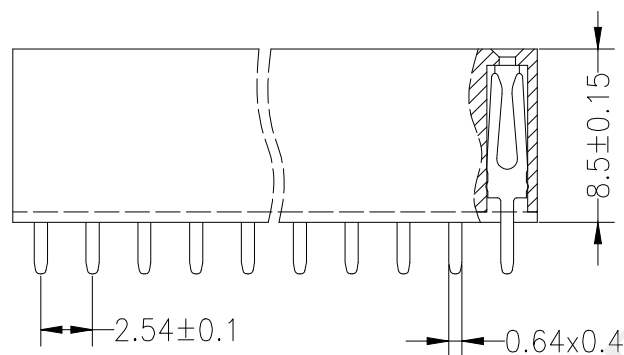


Max.Processing Temp: 260°C±5°C 5S

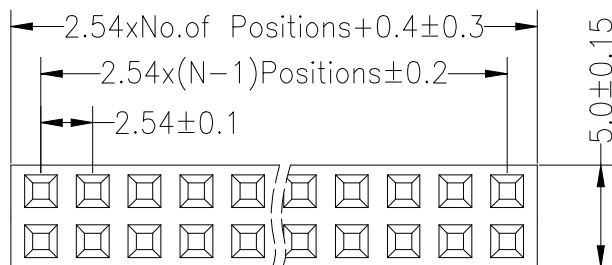

PM 254 - * - N - Z - * - **

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2~40Pin	Type Z-直針 H-帶針 S-彎針 HS-帶插腳	Length (mm) (英寸)	Contact G0:Gold G1:1u Gold G2:3u Gold G3:5u Gold G4:10u Gold G5:15u Gold G6:30u Gold S0:Gold S1:Tin	Plating Flash Flash Flash Flash Flash Flash/Tin
---	------------------------	--	------------------------	--	---

			GENERAL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	2.54双排 排母 直针(塑高8.5)	版 本 REV.	A
1	初版发行		X.XX ±0.20			产品料号 PART NO.	PM254-2-N-Z-8.5-XX (L11.7)	单 位 UNITS	mm
			X.XXX ±0.10	比 例 SCALE					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1