

NOTES:

Voltage Rating:250V AC/DC

Current Rating:3.0A AC/DC

Dielectric Withstand Voltage:1000V AC/minute


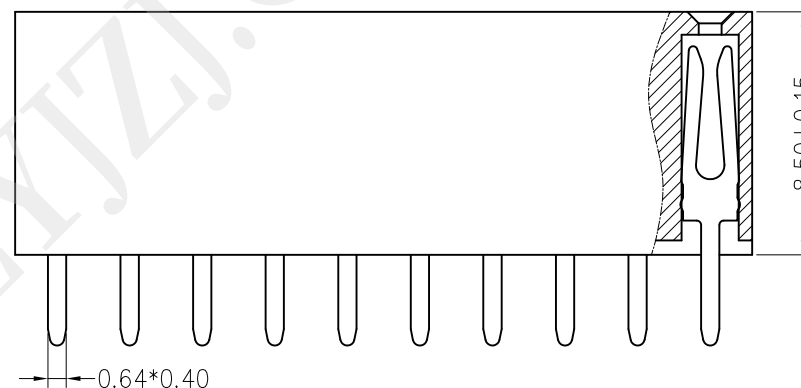
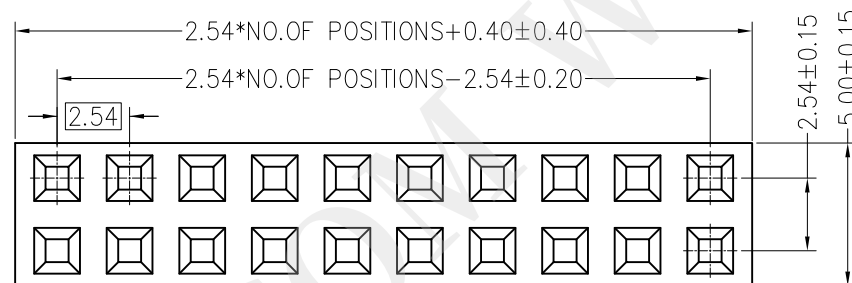
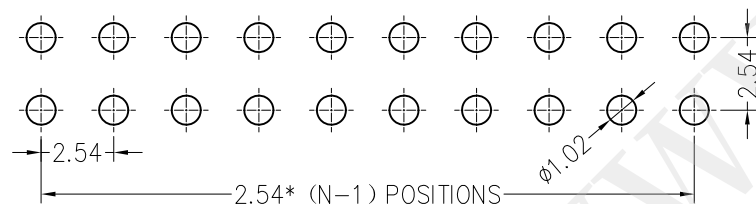
Contact Voltage:20M Ω Max.Insulation Voltage:1000M Ω Min

Operation temperature:-40 °C to +105 °C

Insulator Material:Polyester.UL94V-0

Contact Material:Brass

Contact Plating:Au or Sn Plated on Nickel Overall

Recommended P.C.B Layout
P.C.B Board Tolerance ± 0.05 

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30 X° ±5°	CHKD				DATE	2010. 4. 12
				. X	±0.20 . X° ±2°	APPD		PRODUCT NAME	2.54mm Female Header Connectors	UNITS	mm
				. XX	±0.08 . XX° ±1°					SCALE	1 : 1
A0				. XXX	±0.03 . XXX° ±0.5°	VIEW		PART. NO.	PM254V-12-XX-H85	DWG NO.	009
VER	MODIFICATION		DRAW	DATE							