

NOTES:

Voltage Rating:250V AC/DC

Current Rating:1.5A AC/DC

Dielectric Withstand Voltage:500V AC/minute

Contact Voltage:20M Ω Max.Insulation Voltage:1000M Ω Min


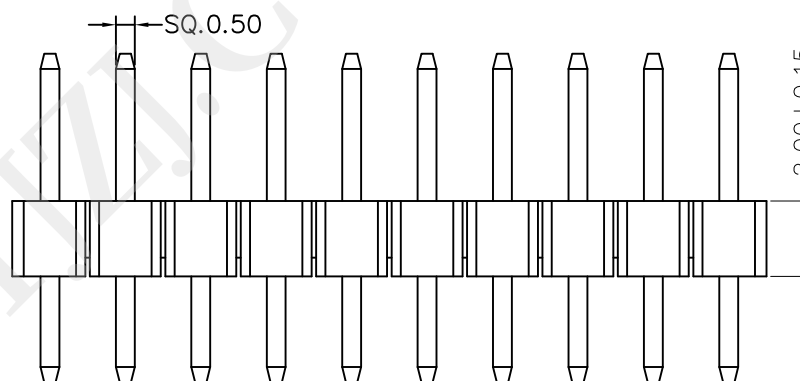
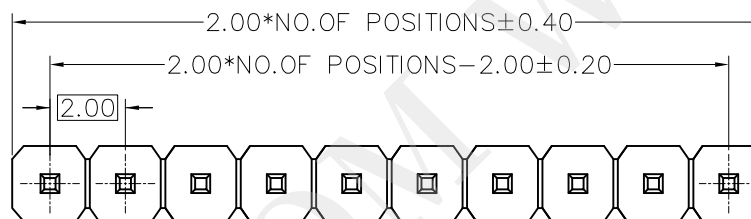
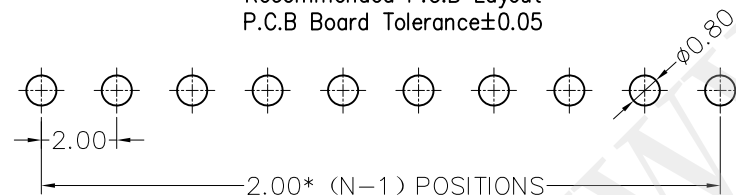
Operation temperature:-40 °C to +105 °C

Insulator Material:Polyester.UL94V-0

Contact Material:Brass

Contact Plating:Au or Sn Plated on Nickel Overall

Recommended P.C.B Layout

P.C.B Board Tolerance ± 0.05 

Dimension antitheses list

item	PA	PC	L
Standard	3.90	2.80	8.70
Alternate	---	---	---

TOLERANCE UNLESS OTHERWISE

X.	± 0.30	X°	$\pm 5^\circ$
.X	± 0.20	.X°	$\pm 2^\circ$
.XX	± 0.08	.XX°	$\pm 1^\circ$
.XXX	± 0.03	.XXX°	$\pm 0.5^\circ$

DRAWN

CK tan

CHKD

APPD

VIEW

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME

2.00mm Pin Header Connectors

PART. NO.

PZ200V-11-XX-0870

SHEET

1/1

DATE

2010. 4. 12

UNITS

mm

SCALE

1:1

DWG. NO.

009

NOTES:

Voltage Rating:250V AC/DC

Current Rating:1.5A AC/DC

Dielectric Withstand Voltage:500V AC/minute

Contact Voltage:20M Ω Max.Insulation Voltage:1000M Ω Min


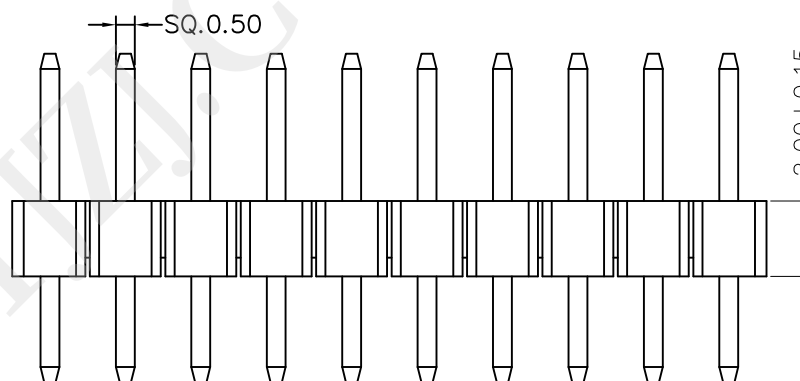
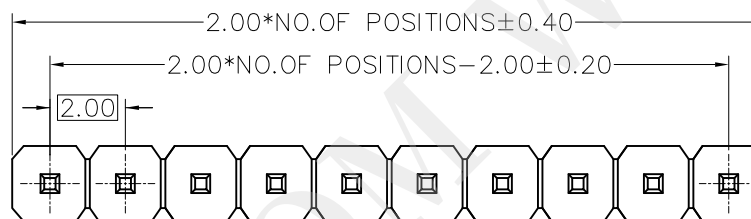
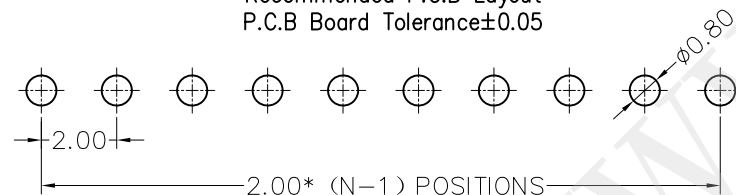
Operation temperature:-40 °C to +105 °C

Insulator Material:Polyester.UL94V-0

Contact Material:Brass

Contact Plating:Au or Sn Plated on Nickel Overall

Recommended P.C.B Layout

P.C.B Board Tolerance ± 0.05 

Dimension antitheses list

item	PA	PC	L
Standard	3.90	2.80	8.70
Alternate	---	---	---

TOLERANCE UNLESS OTHERWISE

X.	± 0.30	X°	$\pm 5^\circ$
.X	± 0.20	.X°	$\pm 2^\circ$
.XX	± 0.08	.XX°	$\pm 1^\circ$
.XXX	± 0.03	.XXX°	$\pm 0.5^\circ$

DRAWN

CK tan

CHKD

APPD

VIEW

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME

2.00mm Pin Header Connectors

PART. NO.

PZ200V-11-XX-0870

SHEET

1/1

DATE

2010. 4. 12

UNITS

mm

SCALE

1:1

DWG. NO.

009