

环保物料

TEL:0769-82001899

NOTES:

Voltage Rating: 250V AC/DC

Current Rating: 3.0A AC/DC

Dielectric Withstand Voltage: 500V AC/minute

Contact Voltage: 20MΩ Max.

Insulation Voltage: 1000MΩ Min

Operation temperature: -40° C to +105° C





Insulator Material: Polyester, UL94V-0

Contact Material: Brass

Contact Plating: Au or Sn Plated on Nickel Overall

Recommended P.C.B Layout

P.C.B Board Tolerance±0.05

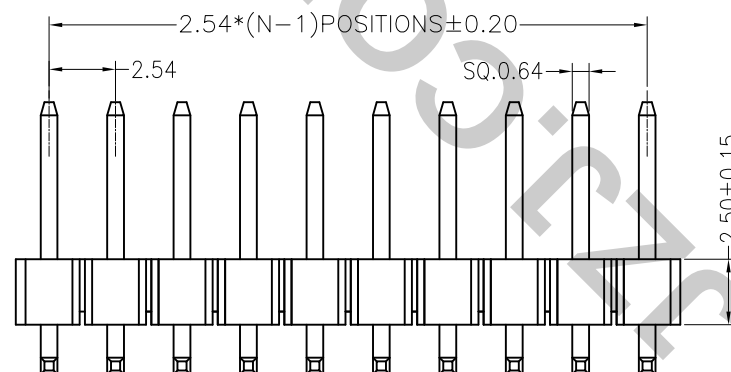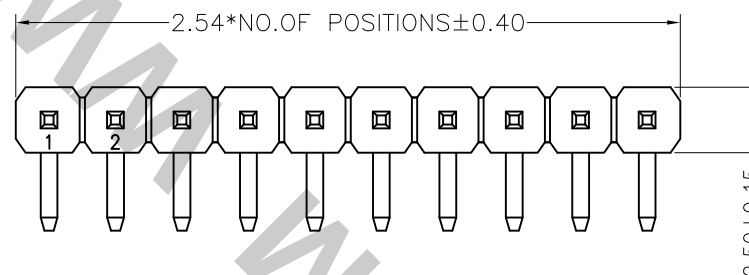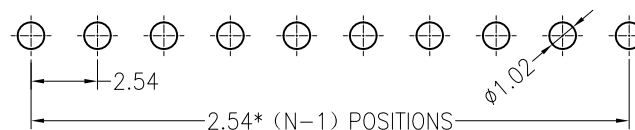

塑胶高度可选 (mm)

常用

H	1.0	1.5	2.0	2.54
---	-----	-----	-----	------

Dimension antitheses list

item	PA	PB	PC	L
Standard	6.00	4.40	3.00	13.80
Alternate	---	---	---	---

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN

CHKD

APPD

VIEW

CK tan

CHKD

APPD

VIEW

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME 2.54mm Pin Header Connectors

PART. NO. PZ254R-11-XX

SHEET

DATE

UNITS

SCALE

DWG. NO.

1/1

2010. 4. 12

mm

1:1

009

A0

VER

MODIFICATION

DRAW

DATE