





环保物料

TEL:0769-82001899

NOTES:

Voltage Rating: 250V AC/DC
Current Rating: 3.0A AC/DC
Dielectric Withstand Voltage: 500V AC/minute
Contact Voltage: 20M Ω Max.
Insulation Voltage: 1000M Ω Min
Operation temperature: -40° C to +105° C
Insulator Material: Polyester. UL94V-0
Contact Material: Brass
Contact Plating: Au or Sn Plated on Nickel Overall

Recommended P.C.B Layout
P.C.B Board Tolerance ± 0.05

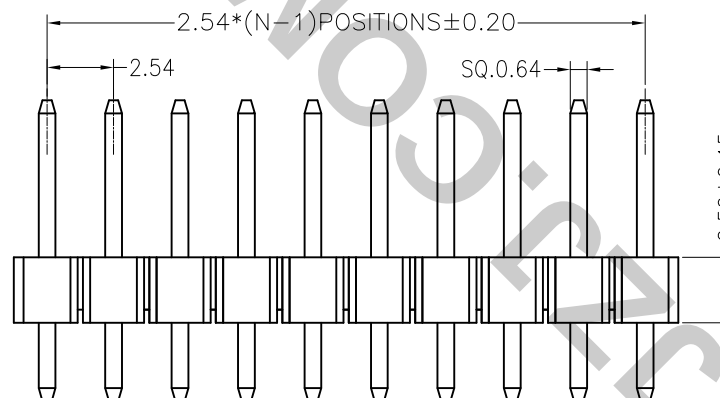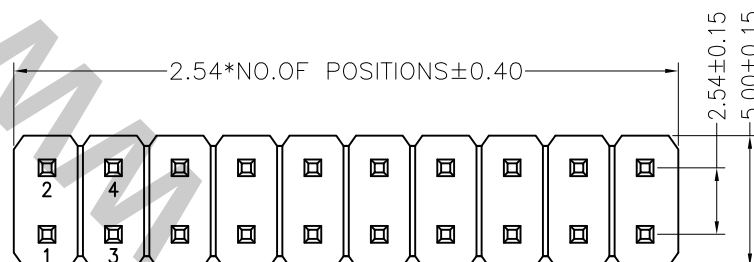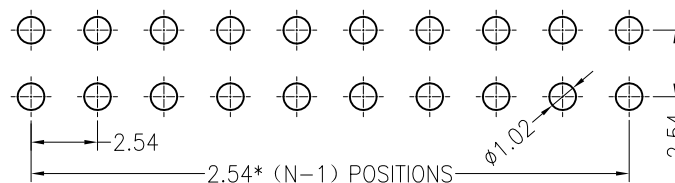

塑胶高度可选 (mm)				常用
H	1.0	1.5	2.0	2.54

Dimension antitheses list				
item	PA	---	PC	L
Standard	6.00	---	3.00	11.50
Alternate	---	---	---	---

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X. ±0.30 X° ±5°	CHKD					DATE	2010. 4. 12
				. X ±0.20 . X° ±2°	APPD			PRODUCT NAME	2.54mm Pin Header Connectors	UNITS	mm
A0				. XX ±0.08 . XX° ±1°						SCALE	1:1
VER	MODIFICATION	DRAW	DATE	. XXX ±0.03 . XXX° ±0.5°	VIEW			PART. NO.	PZ254V-12-XX	DWG NO.	009