

NOTES:

Vol t age Rat i ng: 250V AC/ DC

Current Rating: 3.0A AC/DC

Dielectric Withstand Voltage: 500V AC/minute

Contact Voltage: 20M Ω Max.





Insulation Voltage: 1000MVA Min

Operation temperature: -40° C to +105° C

Insulation Material: Polyester. UL94V-0

Contact Material : Brass

Contact Plating: Au or Sn Plated on Nickel Overall

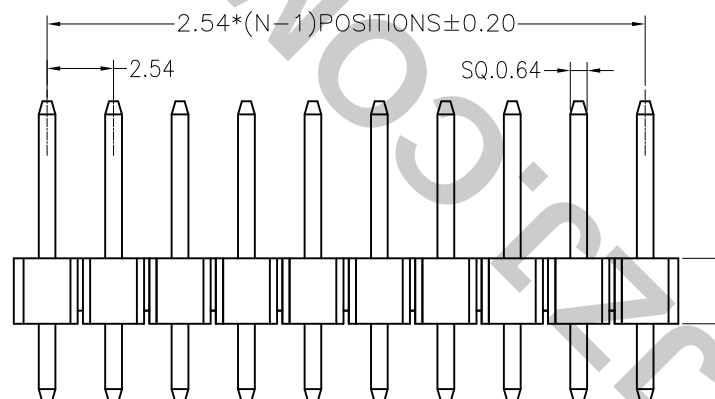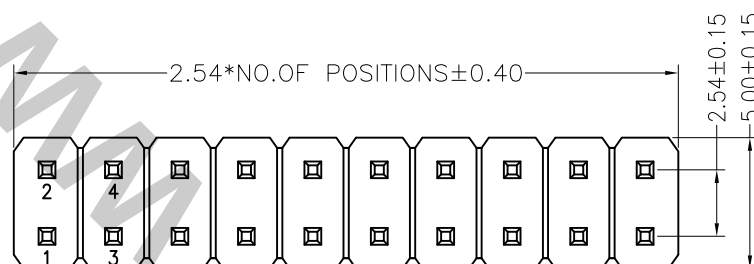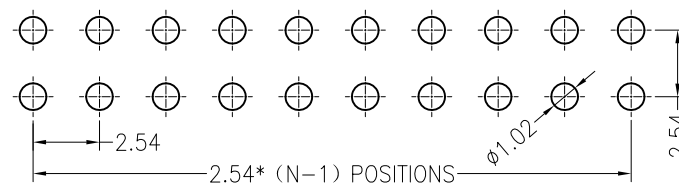

塑胶高度可选 (mm)				常用
H	1.0	1.5	2.0	2.54

Dimension antitheses list				
item	PA	---	PC	L
Standard	6.00	---	3.00	11.50
Alternate	---	---	---	---

				TOLERANCE UNLESS OTHERWISE	DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X. ±0.30 X° ±5°	CHKD				DATE	2010. 4. 12
				. X ±0.20 . X° ±2°	APPD		PRODUCT NAME	2.54mm Pin Header Connectors	UNITS	mm
A0				. XX ±0.08 . XX° ±1°					SCALE	1:1
VER	MODIFICATION	DRAW	DATE	. XXX ±0.03 . XXX° ±0.5°	VIEW		PART. NO.	PZ254V-12-XX	DWG. NO.	009