





环保物料

TEL:0769-82001899

NOTES:

Voltage Rating: 250V AC/DC
Current Rating: 3.0A AC/DC
Dielectric Withstand Voltage: 500V AC/minute
Contact Voltage: 20M Ω Max.
Insulation Voltage: 1000M Ω Min
Operation temperature: -40° C to +105° C
Insulator Material: Polyester. UL94V-0
Contact Material: Brass
Contact Plating: Au or Sn Plated on Nickel Overall

Recommended P.C.B Layout
P.C.B Board Tolerance ± 0.05

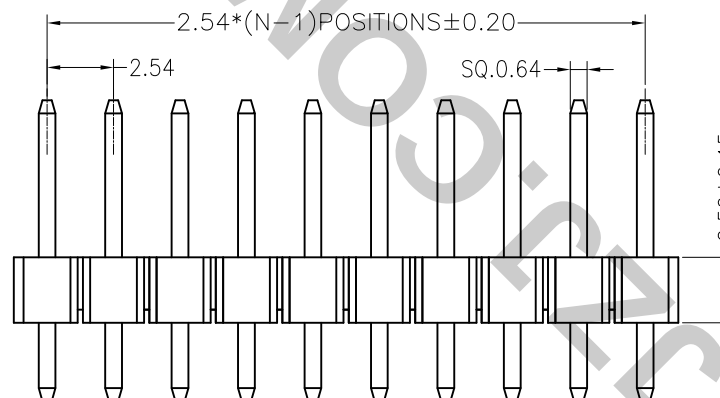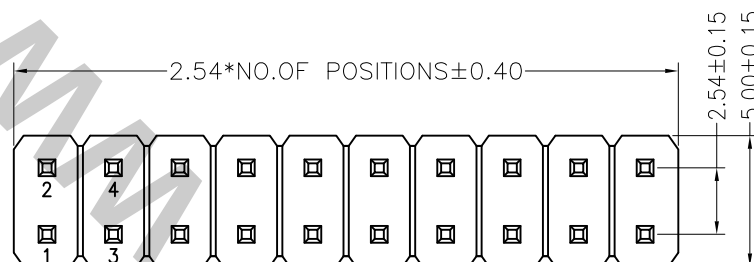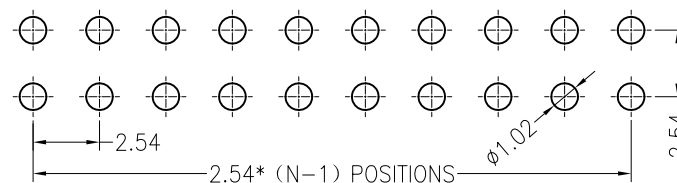

塑胶高度可选 (mm)				常用
H	1.0	1.5	2.0	2.54

Dimension antitheses list				
item	PA	---	PC	L
Standard	6.00	---	3.00	11.50
Alternate	---	---	---	---

				TOLERANCE UNLESS OTHERWISE		DRAWN		CK tan		XFCN 兴飞连接器有限公司		SHEET	1/1
				X.	± 0.30	X°	$\pm 5^\circ$	CHKD		CONNECTORS XFCN CONNECTORS CO., LTD.		DATE	2010. 4. 12
				.X	± 0.20	.X°	$\pm 2^\circ$	APPD		PRODUCT NAME		UNITS	mm
				.XX	± 0.08	.XX°	$\pm 1^\circ$			PART. NO.		SCALE	1:1
				.XXX	± 0.03	.XXX°	$\pm 0.5^\circ$	VIEW		PZ254V-12-XX		DWG. NO.	009