


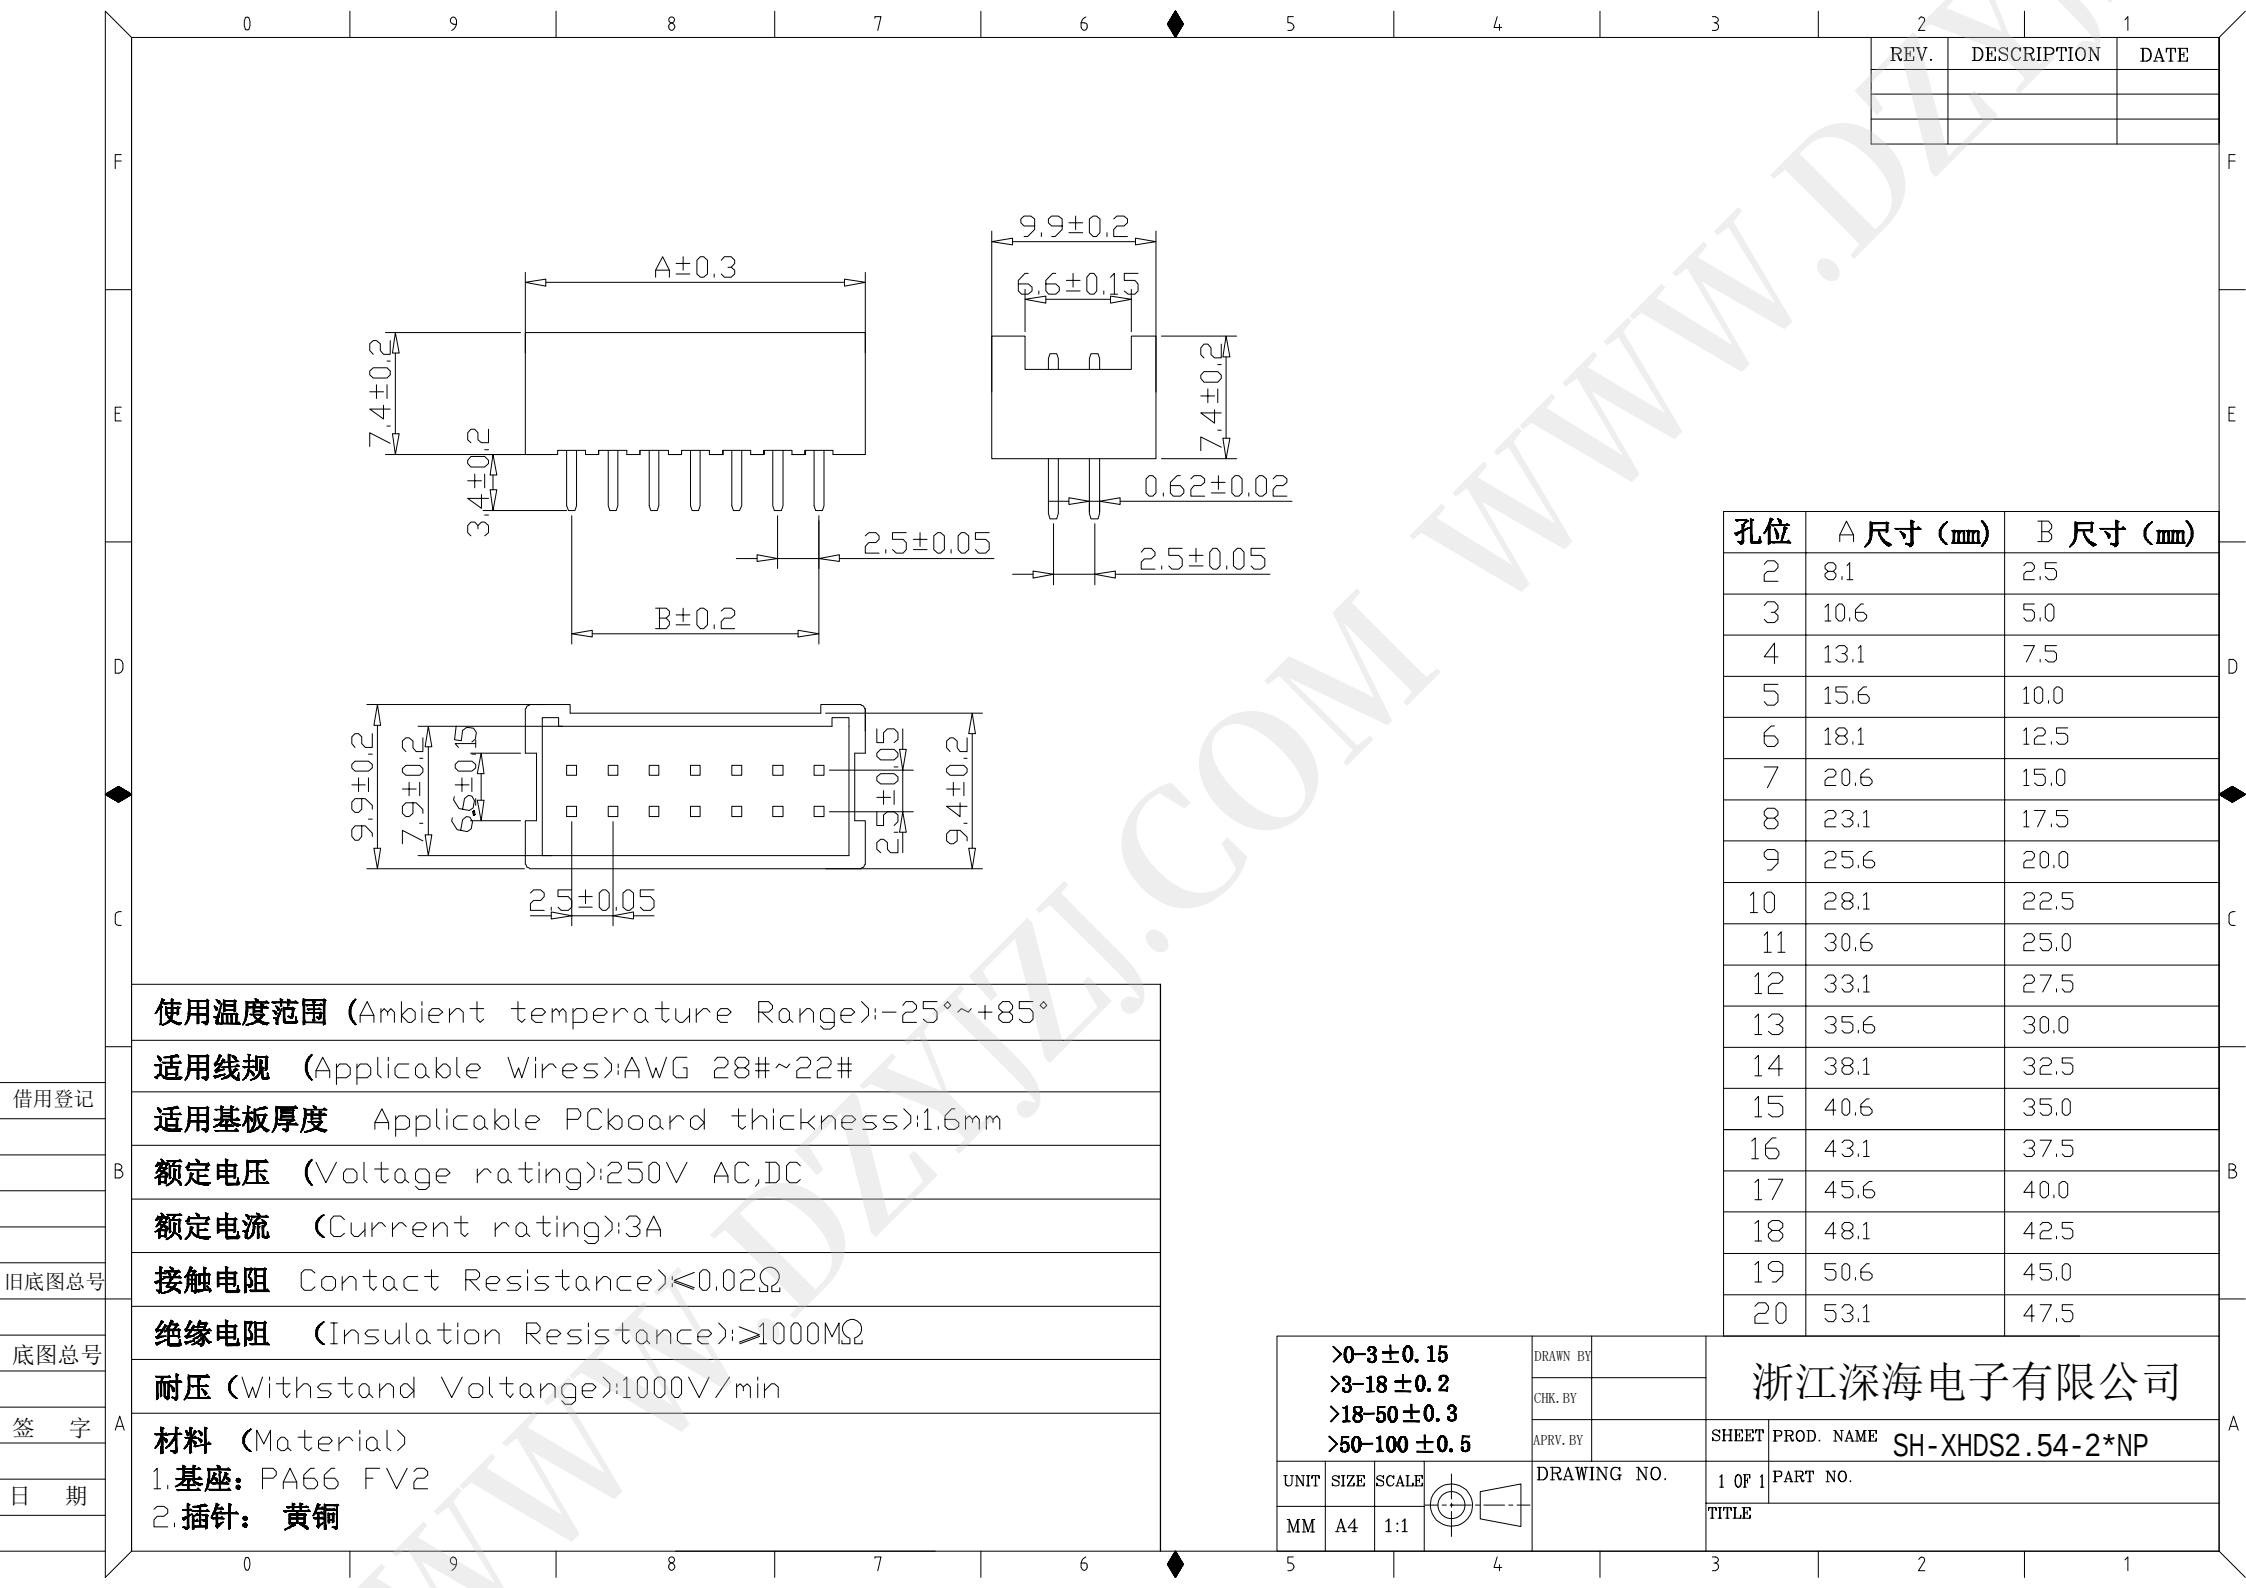

REV.	DESCRIPTION	DATE

孔位	A 尺寸 (mm)	B 尺寸 (mm)
2	8.1	2.5
3	10.6	5.0
4	13.1	7.5
5	15.6	10.0
6	18.1	12.5
7	20.6	15.0
8	23.1	17.5
9	25.6	20.0
10	28.1	22.5
11	30.6	25.0
12	33.1	27.5
13	35.6	30.0
14	38.1	32.5
15	40.6	35.0
16	43.1	37.5
17	45.6	40.0
18	48.1	42.5
19	50.6	45.0
20	53.1	47.5

使用温度范围 (Ambient temperature Range):-25°~+85°

适用线规 (Applicable Wires):AWG 28#~22#

适用基板厚度 Applicable PCboard thickness>1.6mm

额定电压 (Voltage rating):250V AC,DC

额定电流 (Current rating):3A

接触电阻 Contact Resistance)<0.02Ω

绝缘电阻 (Insulation Resistance):>1000MΩ

耐压 (Withstand Voltage):1000V/min

材料 (Material)

1.基座: PA66 FV2

2.插针: 黄铜

>0-3±0.15 >3-18±0.2 >18-50±0.3 >50-100±0.5			DRAWN BY	浙江深海电子有限公司	
			CHK. BY		
			APRV. BY		
UNIT	SIZE	SCALE	DRAWING NO.		SHEET
MM	A4	1:1			1 OF 1
					PART NO.
					TITLE