ROCKER SWITCH

SS11 SERIES



SPECIFICACATION
Rating:12A 125/250VAC(CUL)
16A 125/250VAC(CUL)
16(4)A 250V~T125/55(ENEC10,VDE,CQC)
INITIAL CONTACT RESISTANCE:20mΩ Max
OPERATION FORCE:500±200gf
INSULATION RESISTANCE:100mΩ MIN 500VDC
WITHSTAND VOLTAGE:1000VAC FOR 1MINUTE
ENDURANCE:10,000CYCLES









TERMINAL TYPE		
Q	QUICK-CONN	
S	SOLDERING	
G	QUICK-CONN	
A	SOLDERING	
P	PC TYPE	
L	PC TYPE	

Termianl List

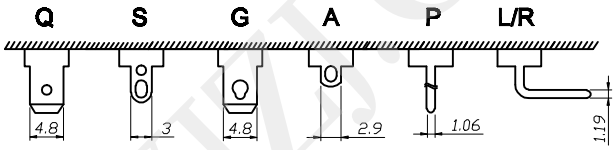

CURRENT CIRCUIT				
20	ON	-	OFF	SPST
21	(ON)	-	OFF	SPST
22	ON	-	(OFF)	SPST
23	ON		OFF	SPST
30	ON		ON	SPDT

PANEL CUTOUT DIMENSION

PANEL THICKNESS	X	Y
0.8~1.2mm	19.2 $^{+0}_{-0.1}$ mm	12..9 $^{+0.1}_{-0}$ mm
1.3~2.0mm	19.4 $^{+0}_{-0.1}$ mm	12.9 $^{+0.1}_{-0}$ mm
2.1~2.5mm	19.8 $^{+0}_{-0.1}$ mm	12.9 $^{+0.1}_{-0}$ mm



SS11 SERIES ORDERING SYSTEM

SS11 - B B I W Q - R R A 2 0 - L 0 3 - R

MODEL NO.

ACTUATOR COLOR		HOUSING COLOR	
B	BLACK	W	WHITE
R	RED	E	GREY
L	BLUE		

PRINTING COLOR	
W	WHITE
B	BLACK
N	NONE

ACTUATOR TYPE	
R	ROCKER

HOUSING TYPE	
	SQUARE
R	ROUND
E	ELLIPSE

RATING	
	12A 125/250VAC 16A 125/250VAC
A	12A 125/250VAC

LAMP TYPE	
L	WITH LAMP
	NONE

LIGHT COLOR	
0	AMBER(S)
2	RED
3	GREEN
4	BLUE
	NONE

RoHS DIRECTIVE	
R	MEET RoHS DIRECTIVE
	NONE

PRINTING OPTION

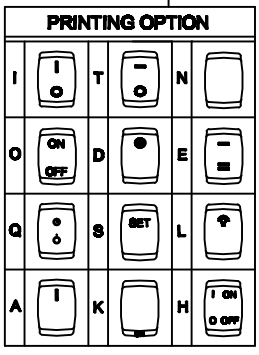

TERMINAL TYPE	
Q	QUICK-CONN
S	SOLDERING
G	QUICK-CONN
A	SOLDERING
P	PC TYPE
L	PC TYPE

CURRENT CIRCUIT				
20	ON	-	OFF	SPST
21	(ON)	-	OFF	SPST
22	ON	-	(OFF)	SPST
23	ON		OFF	SPST
30	ON		ON	SPDT

RESISTOR	
	NONE
1	100KΩ
2	200KΩ
3	300KΩ

WWW.DZSJ.COM