


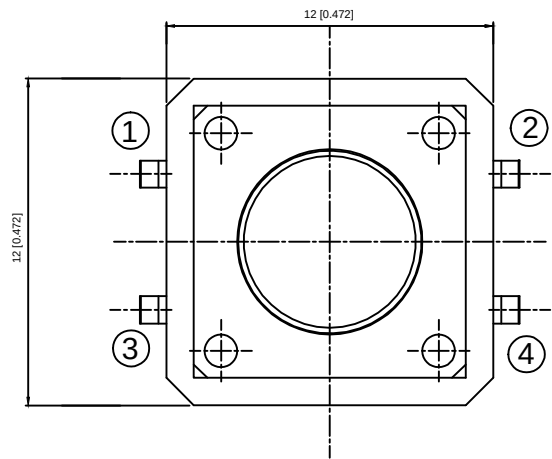
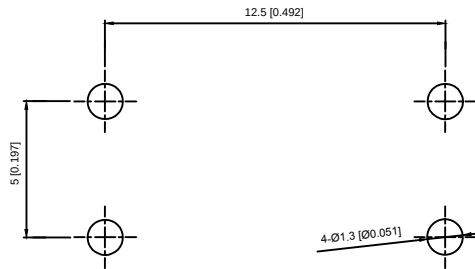




P.C.B Mounting
pattern Dimension

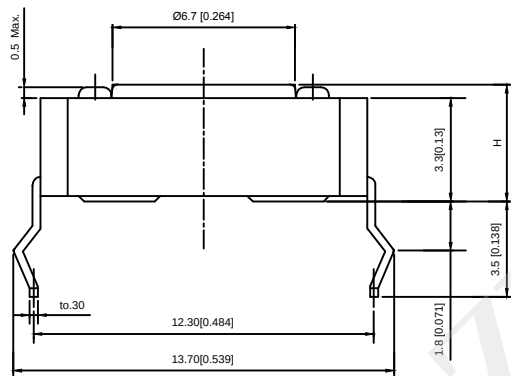

Circuit diagram



Code-x	H	Code-x	H
A	4.3	O	11.0
B	4.5	P	11.5
C	5.0	Q	12
D	5.5	R	12.5
E	6.0	S	13.0
F	6.5	T	13.5
G	7.0	U	14.0
H	7.5	V	15.0
I	8.0	W	16
J	8.5	X	17
K	9.0	Y	18
L	9.5	Z	19
M	10.0		
N	10.5		

SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TC-1103-X-X
Operating Force	B:160gf C:260gf
Height	Code-X

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
Δx					units: mm	DWN		DATE		VIEW: 	PART NO.:		
Δx					X.X ±0.2mm	CHKD		DATE		UNIT: mm/in	DWG NO.:		
Δx					X.XX ±0.1mm	APPD		DATE		SIZE: A4	TC-1103-X-X		
MARK	DESCRIPTION			DATE	REVISED						APPROVED	X.XXX ±0.05mm	
REVISIONS						UNSPECIFIED TOLERANCES					WEIGHT		
											1.0g		
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						XKB INDUSTRIAL PRECISION CO.,LIMITED					SHEET		
											1/1		
											REVISION		
											A0		