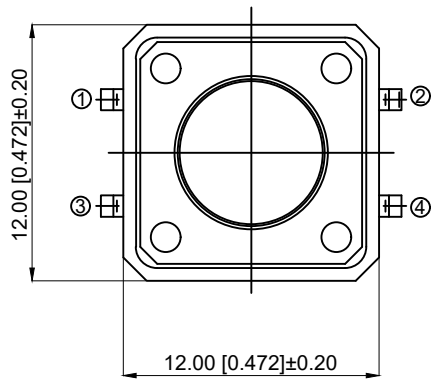

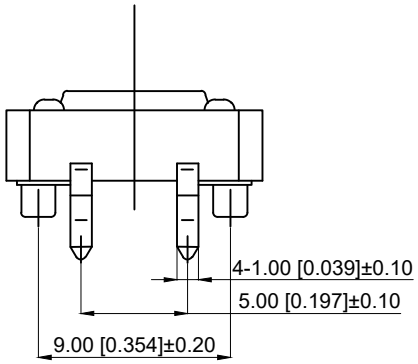



CIRCUIT DIAGRAM

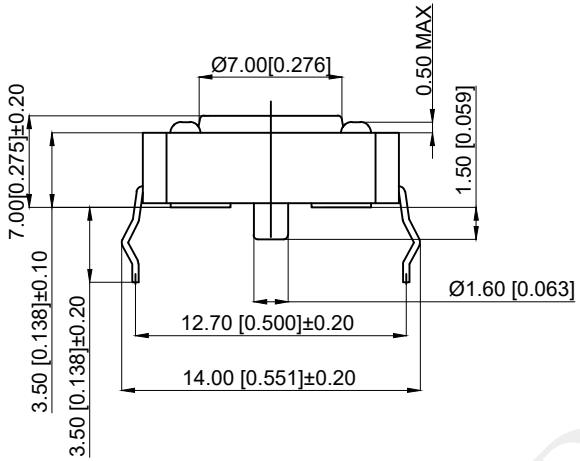

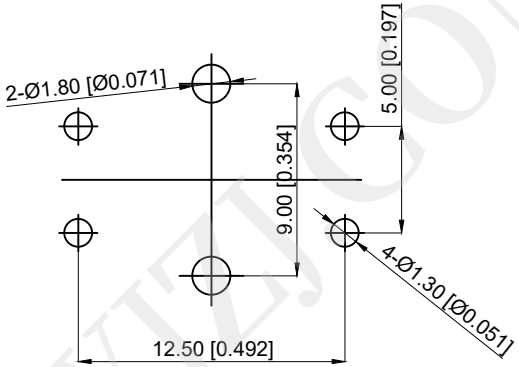

PCB LAND DIMENSION

1.Rating:DC 12V 50mA
1.额定值：DC 12V 50mA
2.Contact Resistance:100mΩ MAX
2.接触电阻：最大100mΩ
3. Insulation resistance: ≥ 100M Ω
3.绝缘电阻：≥100MΩ
4. Stroke: 0.35 ± 0.10mm
4.行程：0.35±0.10mm
5. Service life: 100000 times
5.使用寿命：100000 次
6. Operating force: 350 ± 50gf
6.操作力：350±50gf
7. Operating temperature: - 20 ℃~ + 70 ℃
7.使用温度：-20℃~ + 70℃

NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注
5	Terminal 端子	Brass 黄铜	4	Ag plating 镀银
4	Base 基座	PA6T	1	Black 黑色
3	Contact 弹片	SUS	1	Ag plating 镀银
2	Stem 按钮	PA6T	1	Yellow 黄色
1	Cover 盖板	Brass 黄铜	1	Sn plating 镀锡

REV	DATE	REVISION DESCRIPTION	ISSUE
A4			
A3			
A2			
A1			

台普 ROCPU

COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	———

UNIT	MM	PROJCTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP11013570
DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw

ROCPU TECHNOLONGY CO.,LTD

Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission

WWW.DZYJ.COM