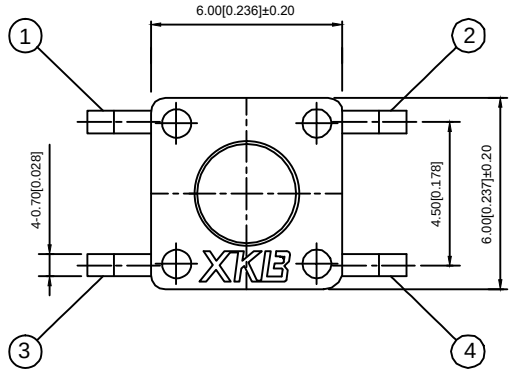

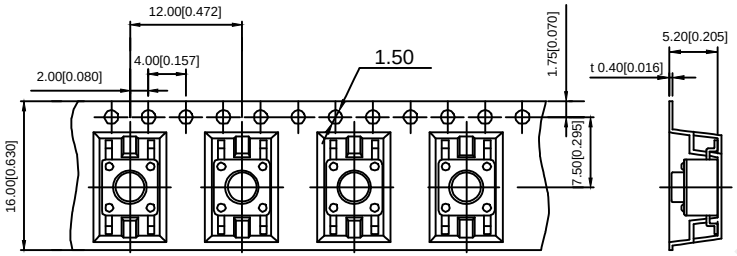

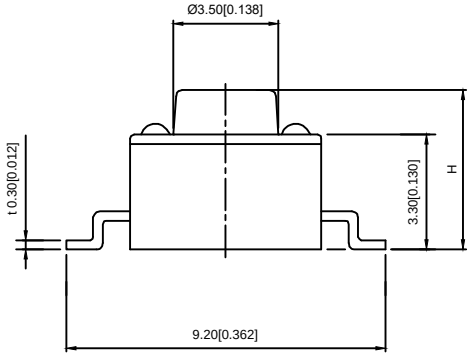



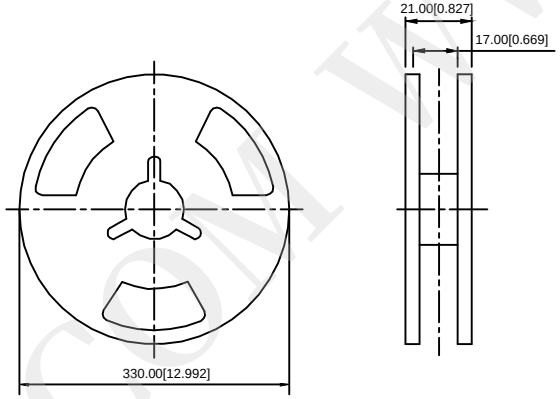

PACKING REEL TYPE

Code-x	H
A	4.3
B	4.5
C	5.0
D	5.5
E	6.0
F	6.5
G	7.0
H	7.5
I	8.0
J	8.5
K	9.0
L	9.5
M	10.0
N	10.5

Code-x	H
O	11.0
P	11.5
Q	12
R	12.5
S	13.0
T	13.5
U	14.0
V	15.0
W	15.5
X	16
Y	16.5
Z	17
18	18
19	19

SPECIFICATION

Contact Rating：	50mA,12V DC
Contact Resistance：	100mΩ max
Insulation Resistance：	100mΩ min.500V DC
Dielectric Strength：	250V AC/1minute
Travel：	0.25mm
Operating Temp：	-20℃~+70℃
Storage Temp：	-40℃~+85℃

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

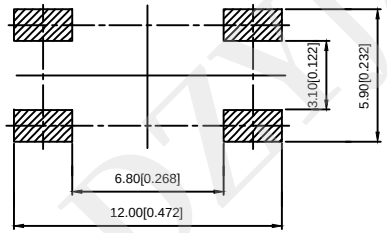

PAPT NO	TS-1102SD-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-x
Color	B:Black BR:Brown R:Red O:Orange Y:Yellow BL:Blue W:White

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	——	4	Brass（0.30t）	Plating silvering	——
④	Contact	——	1	F.ag/Sus	Natural	——
③	Base	——	1	Pa46		——
②	Cover	——	1	Bass	Plating Nickel	——
①	Keystake	——	1	Pa46		——

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

MODEL TYPE: TACT SWITCH

PART NO.:

DWG NO.: TS-1102SD-X-X-X

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

WWW.DZYJ.COM