
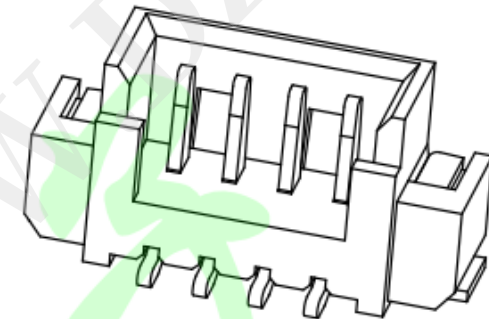
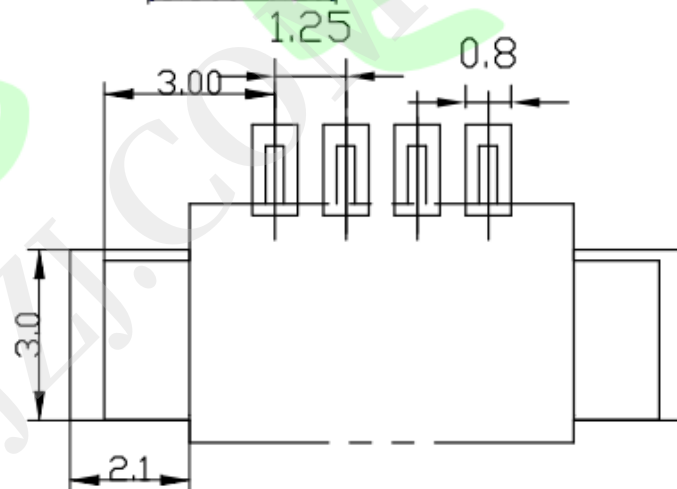
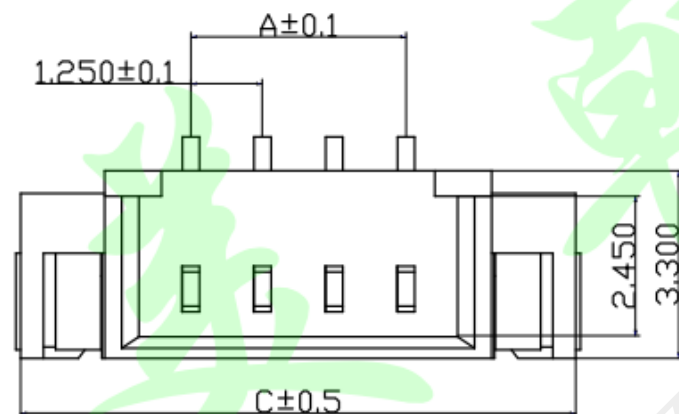



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		2016.8.13

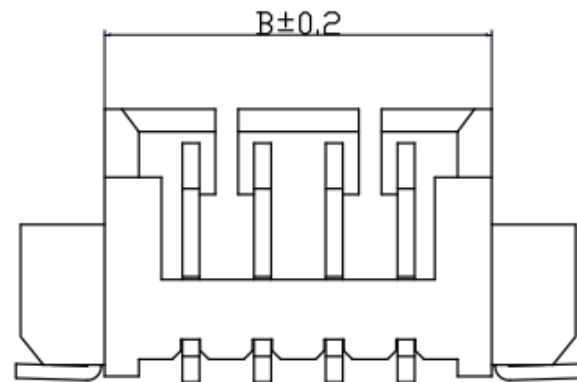

Specifications / 技术规格:

Current rating: 1A

额定电流: 1A

Voltage rating: 125 V AC, DC

额定电压: 125V AC, DC

Insulation Resistance: 500 MΩ Min.

绝缘电阻: 最小500MΩ

Dielectric Withstanding: 500V AC 1Min

耐电压: 500V AC 1分钟

Contact Resistance: 20mΩ Max.

接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C

工作温度: -25°C 到85°C

Materials / 材料:

Contact Material: Brass (Sn plating)

接触铜针材料: 黄铜(镀锡)

Soldering Terminal: Brass (Sn plating)

焊片材料: 黄铜(镀锡)

Insulation Material: LCP UL94V-0

绝缘体材料: LCP UL94 V-0

孔数	型号	尺寸 (mm)		
		A	B	C
2	125-2ALT	1.25	4.30	7.00
3	125-3ALT	2.50	5.55	8.25
4	125-4ALT	3.75	6.80	9.50
5	125-5ALT	5.00	8.05	11.30
6	125-6ALT	6.25	9.30	12.55
16	125-16ALT	18.75	21.80	24.50

东莞市美韩电子科技有限公司

Dongguan Usakro Electronic Technology Co., Ltd.

GENERAL TOLERANCE

X* ± 3°	.XXX	±0.10
.X* ± 2°	.XX	±0.15
.XX* ± 1°	.X	±0.25
.XXX* ± 0.5°	X.	±0.35

DESIGN: WWH

DATE: 2016.8.13

DWG. NO.

TITLE.

CHECKED:

DATE: 2016.8.13

AUDITED:

DATE: 2016.8.13

APPROVED:

DATE: 2016.8.13

PART NO.

UK-1.25-2ALT

1.25立贴

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--