

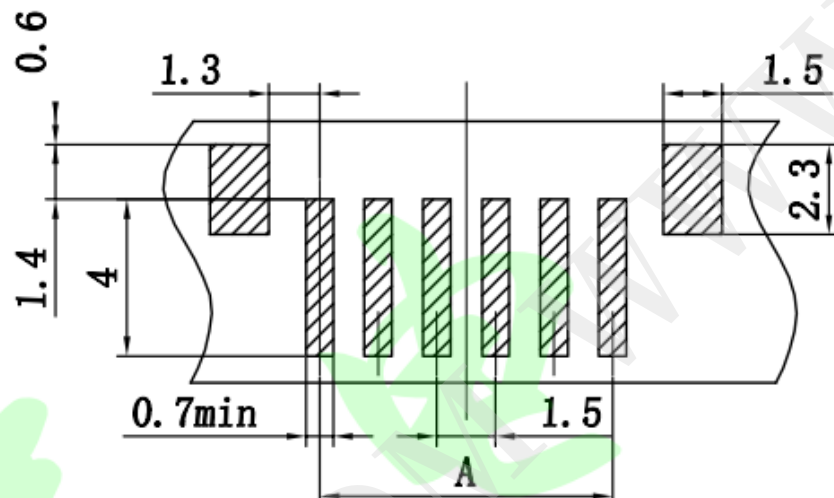
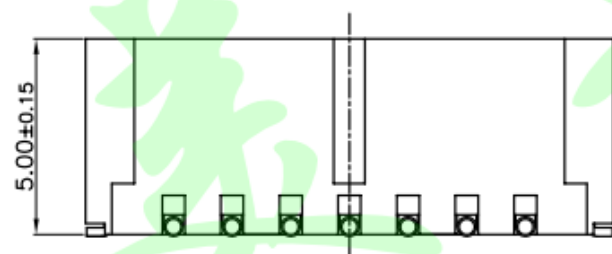


ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		2016.8.13

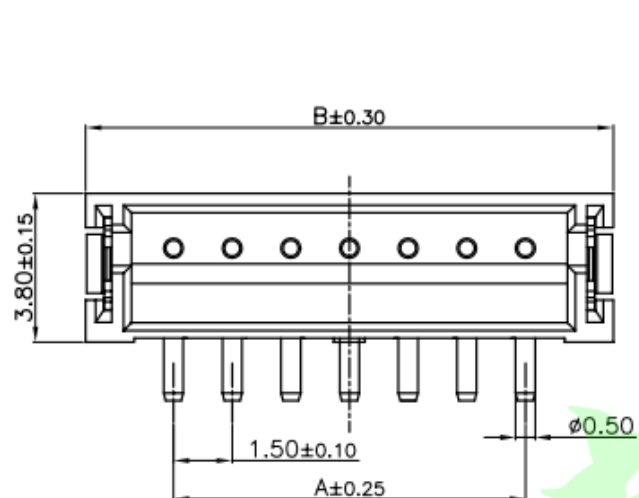

Recommended P.C.Board Layout

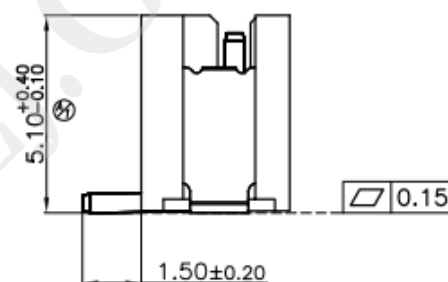

Specifications / 技术规格:

Current rating: 1A
 额定电流: 1A
 Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC
 Insulation Resistance: 500 MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐电压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials / 材料:

Contact Material: Brass (Sn plating)
 接触铜针材料: 黄铜(镀锡)
 Soldering Terminal: Brass (Sn plating)
 焊片材料: 黄铜(镀锡)
 Insulation Material: LCP UL94V-0
 绝缘体材料: LCP UL94 V-0

孔数	型号	尺寸 (mm)	
		A	B
2	15-2ALT	1.5	6.0
3	15-3ALT	3.0	7.5
4	15-4ALT	4.5	9.0
5	15-5ALT	6.0	10.5
6	15-6ALT	7.5	12.0
16	15-16ALT	22.5	27.0

东莞市美韩电子科技有限公司
 Dongguan Usakro Electronic Technology Co., Ltd.

GENERAL TOLERANCE

X* ± 3°	.XXX ± 0.10
.X* ± 2°	.XX ± 0.15
.XX* ± 1°	.X ± 0.25
.XXX* ± 0.5°	X. ± 0.35

DESIGN: WWH

DATE: 2016.8.13

DWG. NO.

CHECKED:

DATE: 2016.8.13

AUDITED:

DATE: 2016.8.13

APPROVED:

DATE: 2016.8.13

PART NO.

UK-1.5-2ALT

TITLE.

ZH1.5立贴

REV.	A	UNIT.	MM	SCALE.	1:1
------	---	-------	----	--------	-----