

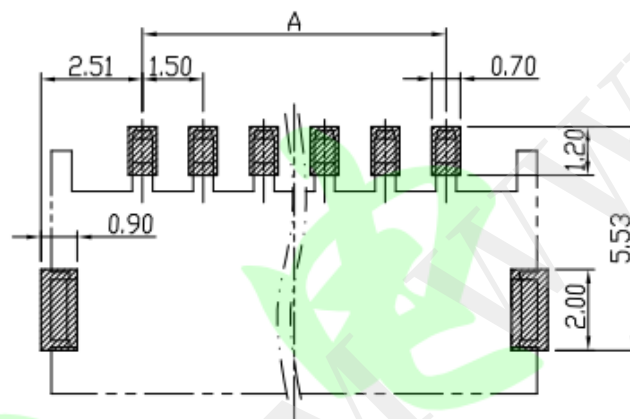
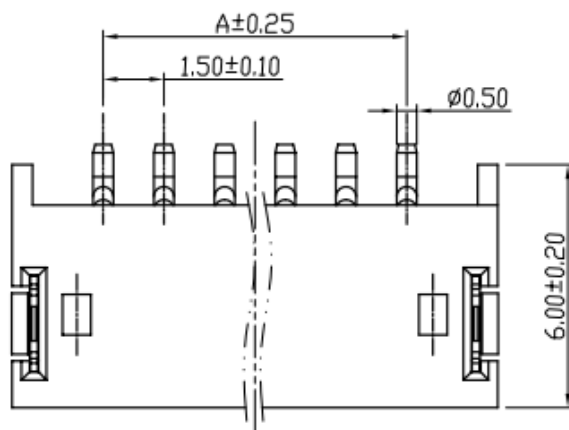


ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		2016.8.13



Recommended P.C.Board Layout (top view)

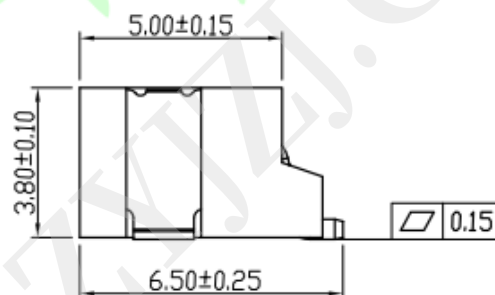

Specifications / 技术规格:

Current rating: 1A
额定电流: 1AVoltage rating: 50V AC, DC
额定电压: 50V AC, DCInsulation Resistance: 500 MΩ Min.
绝缘电阻: 最小500MΩDielectric Withstanding: 500V AC 1Min
耐电压: 500V AC 1分钟Contact Resistance: 20mΩ Max.
接触电阻: 最大20mΩOperating Temperature: -25°C to +85°C
工作温度: -25°C 到85°C

Materials / 材料:

Contact Material: Brass (Sn plating)
接触铜针材料: 黄铜 (镀锡)Soldering Terminal: Brass (Sn plating)
焊片材料: 黄铜 (镀锡)Insulation Material: LCP UL94V-0
绝缘体材料: LCP UL94 V-0

孔数	型号	尺寸 (mm)		
		A	B	
2	15-2AWT	1.5	6.0	
3	15-3AWT	3.0	7.5	
4	15-4AWT	4.5	9.0	
5	15-5AWT	6.0	10.5	
6	15-6AWT	7.5	12.0	
16	15-16AWT	22.5	27.0	

东莞市美韩电子科技有限公司
Dongguan Usakro Electronic Technology Co., Ltd.

GENERAL TOLERANCE

X.° ± 3° .XXX ± 0.10

.X° ± 2° .XX ± 0.15

.XX° ± 1° .X ± 0.25

.XXX° ± 0.5° X. ± 0.35

DESIGN: WWH

CHECKED:

AUDITED:

APPROVED:

DATE: 2016.8.13

DATE: 2016.8.13

DATE: 2016.8.13

DATE: 2016.8.13

DWG. NO.

PART NO.

UK-1.5-2AWT

TITLE.

1.5卧贴

REV. A UNIT. MM SCALE. 1:1