
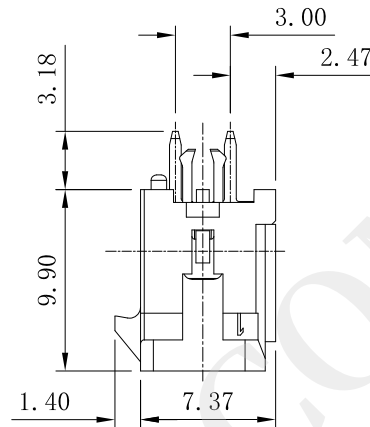
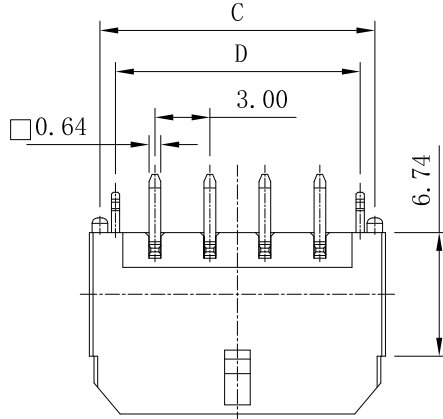



REV.	ECN Number	Description	Drawn
1	CS25080089	First Edition Issue	L.L2025/08/20



Specifications:

- Dimensions Shall Be Interpreted Per Asme Y14.5-2009.
Product Comply ROHS Specification.
- Material Of Components:
 - Insulator Material: LCP,Black.
 - Contact Material: Terminal: Brass.
 - Contact Material: Case Contact: Brass.
- Product Number Matrix:

WJ01-XX2-X-VHT

WTB
J:3.00PH
Series
PIN NO.
08=8Pin
2:T/H, V/T
Extened code
3:Without Locking Plate Foot
4:Locking Plate Foot



Packing

A:PE
J:BOX
G:TUBE
F:TUBE+PAD
E:TUBE+MPAD
F:TUBE+MYLAR
K:REEL
C:REEL+MYLAR
B:REEL+MPAD
R:REEL+PAD
T:TRAY
N:TRAY+MYLAR
D:TRAY+MPAD
M:TRAY+PAD
S:HOT SEALING REEL
L:HOT SEALING REEL+PAD
Q:HOT SEALING REEL+MPAD
U:HOT SEALING REEL+MYLAR

plating

Definition	Code
⊙ Matte Tin plated	A
⊙ Bright Tin plated	V
⊙ Gold plated over all	
flash B 1u" R 3u" C	
5u" D 10u" E 15u" F	
20u" G 25u" H 30u" J	
⊙ Duplex plated	
flash K 1u" S 3u" L	
5u" M 10u" N 15u" P	
20u" Q 25u" T 30u" U	
⊙ All plated is lead free.	

Null:Thermoplastic
H:Halogen Free
F:High Temperature
Thermoplastic

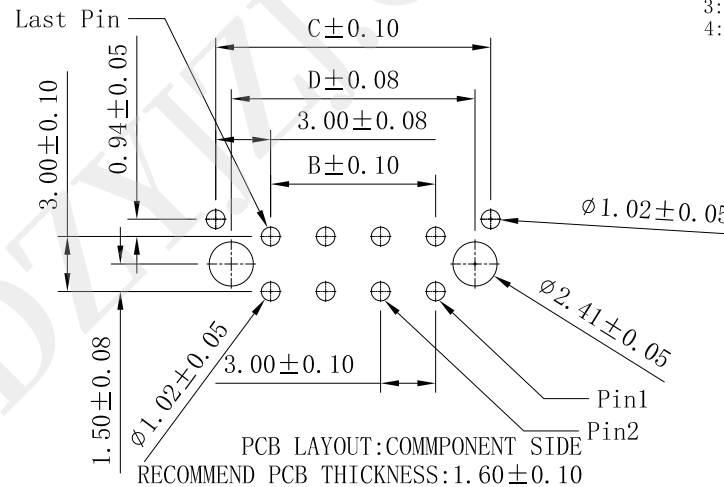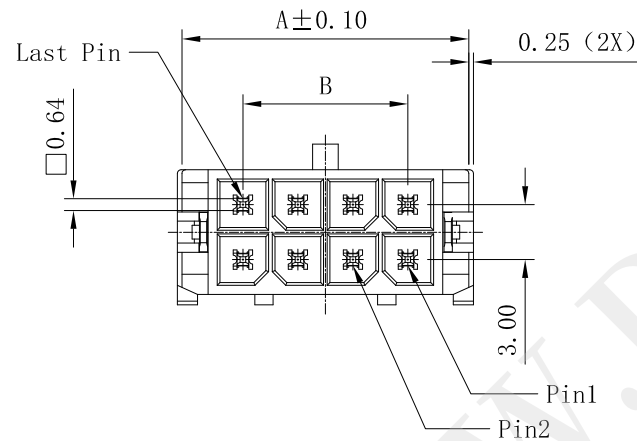

PCB LAYOUT:COMMON SIDE
RECOMMEND PCB THICKNESS:1.60±0.10



ShenZhen ShenTai weixiang Electronics Co., Ltd.

TOLERANCE UNLESS OTHERWISE SPECIFIED			
X.X	±0.35	X.°	±3°
X.XX	±0.20	X.X°	±2°
X.XXX	±0.10	X.XX°	±1°

SCALE	1:1
UNIT	MM
SIZE	A4

ORIGINAL DRAWN:	Lun Li
CHECK:	Zan Zhu
APPROVE:	Wolfe Liu

DATE	2025/08/20
DATE	2025/08/20
DATE	2025/08/20

DGW. NO.	600-0000-0801
PARTS NO. (INTENDED USE)	WJ01-XX2-X-VHT

TITLE
Micro Fit 180° DIP
Straight Needle
Customer Diagram

REV.	1
SHEET	1/3

