
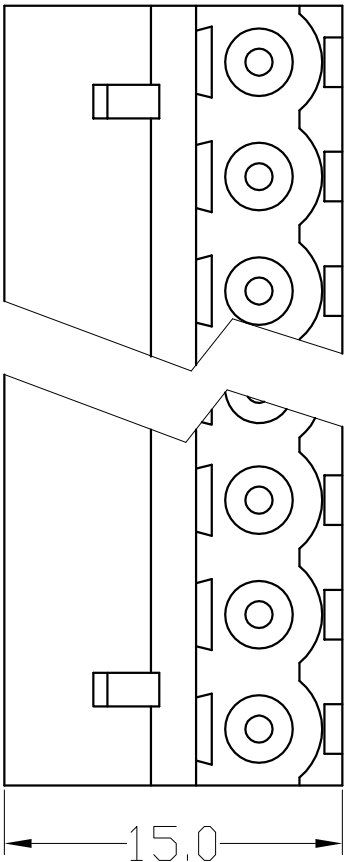
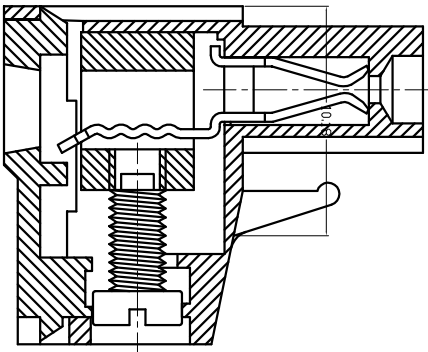


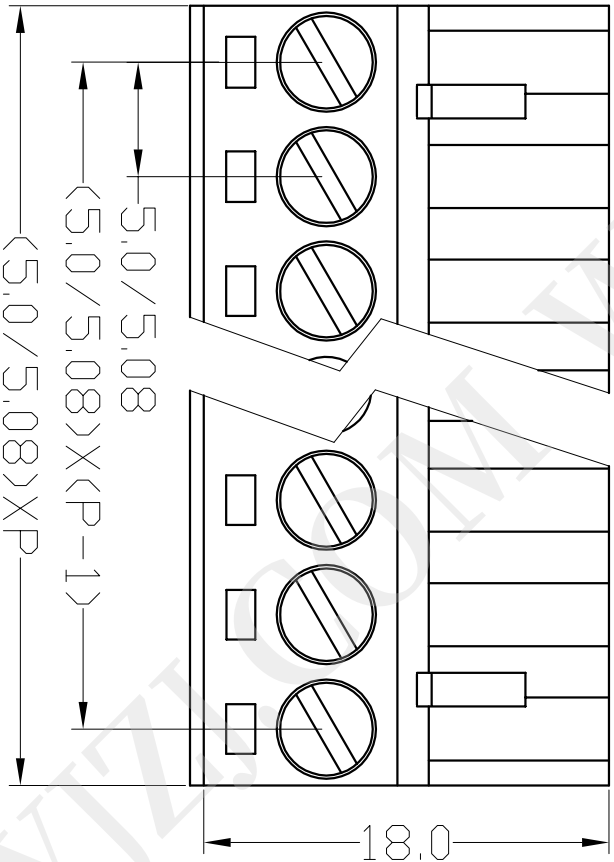

300V 15A 2.5mm²
Poles: 2-24P
Pitch: 5.0mm(.197")/5.08mm(.200")

Materials
Housing: PA66 (UL 94V-0)
Contact: Phosphor Bronze, Nickel Plated.
Wire Cage: Brass(Nickel Plated) or Steel(zinc plated)
Screw: M2.5, Steel, A3 Zinc Plated.
Torque: 0.4N.m

序号 /RevNo.	更改记录 /Revision note	签名 /Signature	日期 /Date
------------	---------------------	---------------	----------

设计 /Designed by	绘图 /Drawing by	审核 /Checked by	批准 /Approved by	未注公差 General Tolerance	
 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD		图名 /Title		文件编号 /File No.	
				.xx ± 0.1	
				.xxx ± 0.05	
				.xxx ± 0.01	
备注 /Remark		页序 /Sheet		单位 /Units: mm	