
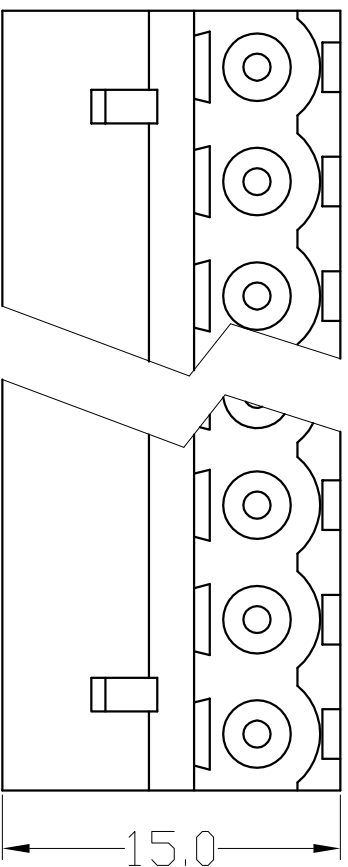
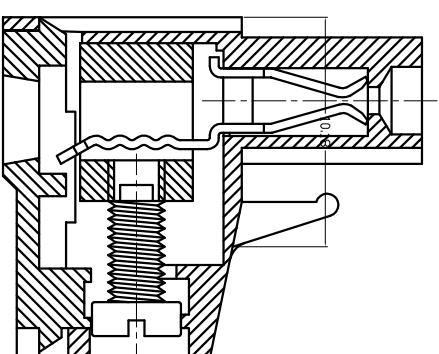


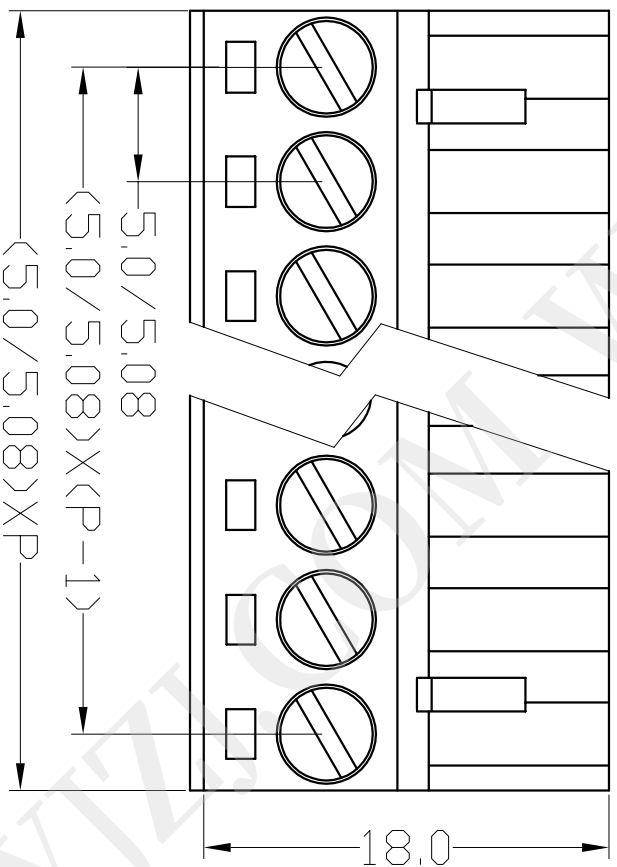

300V 15A 2.5mm²

Poles: 2-24P

Pitch: 5.0mm(.197")/5.08mm(.200")

Materials

Housing: PA66 (UL 94V-0)

Contact Phosphor Bronze, Nickel Plated.

Wire Cage: Brass(Nickel Plated) or Steel(zinc plated)

Screw: M2.5, Steel, A3 Zinc Plated.
Torque: 0.4N.m

设计 /Designed by		绘图 /Drawing by		审核 /Checked by		批准 /Approved by		未注公差 General Tolerances	
 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD				图名 /Title		文件编号 /File No.		X ± 0.2	
				XY2500FA-5.0 XY2500FB-5.08				X ± 0.1	
								.XX ± 0.05	
								.XXX ± 0.01	
备注 /Remark				页序 /Sheet				单位 /Units: mm	
序号 /Rev.No.		更改记录 /Revision note		签名 /Signature		日期 /Date			