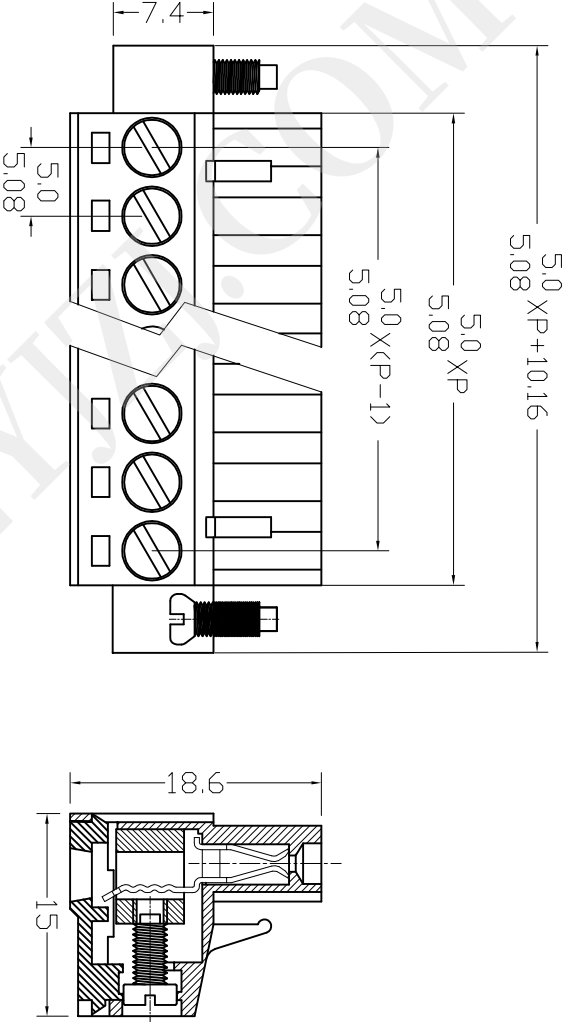


300V 15A 2.5mm² 28-12AWG
Poles: 2-12P
Pitch: 5.0mm(.197"),5.08mm(.200")

Materials

Housing: PA66 (UL 94V-0)
Contact: Phosphor Bronze, Nickel Plated.
Wire Cage: Brass (Nickel Plated) or
Steel (Zn Plated)
Screw: M2.5, Steel, A3 Zinc Plated.

序号/revmo.	更改记录/revision note	签名/signature	日期/date
-----------	--------------------	--------------	---------

设计/Designed by		绘图/Drawing by		审核/Checked by		批准/Approved by		未注公差 General Tolerance	
 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD		图名/Title		文件编号/File No.		页序/Sheet		X. ±0.2	X. ±2°
								.X ±0.1	.X° ±1°
								.xx ±0.05	.xx° ±0.5°
								.xxx ±0.01	
备注/Remark								单位/Units: mm	