序号/RevNo.	名称/Title	文件编号/File No.

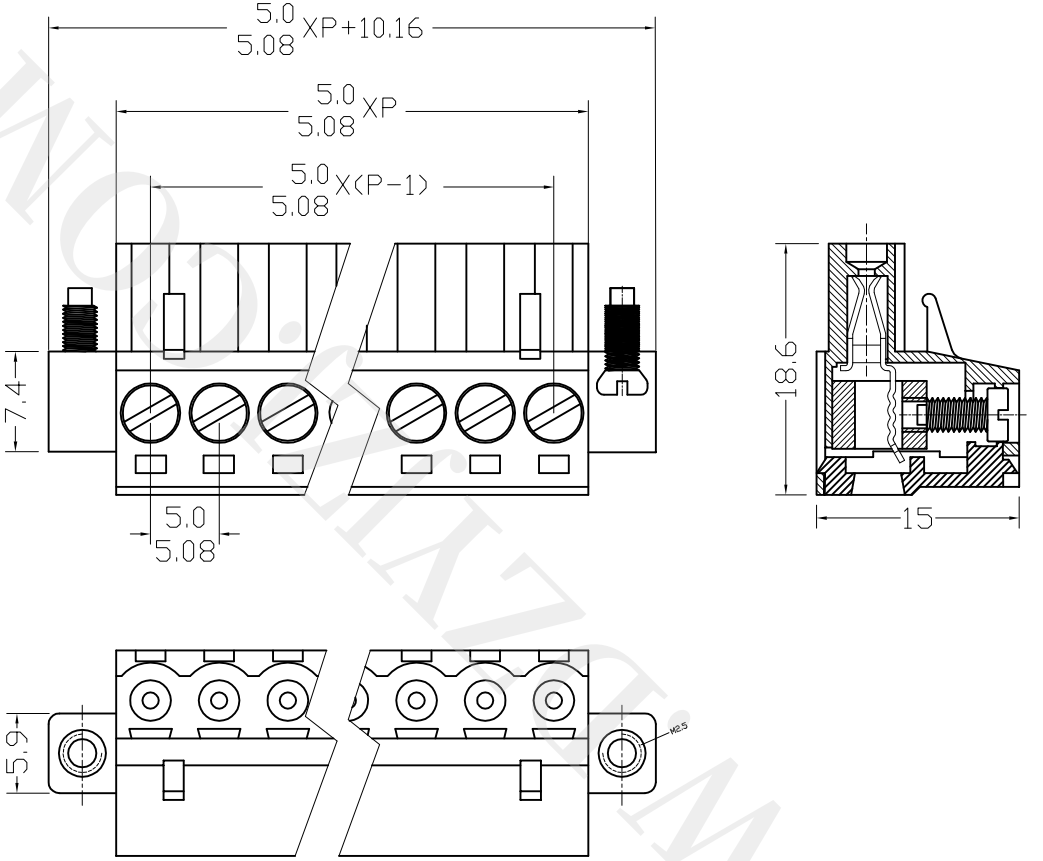

300V 15A 2.5mm^2 28-12AWG

Poles: 2-12P

Pitch: 5.0mm(.197"),5.08mm(.200")

Materials

Housing: PA66 (UL 94V-0)

Contact: Phosphor Bronze, Nickel Plated.

Wire Cage: Brass (Nickel Plated) or
Steel (Zn Plated)

Screw: M2.5, Steel, A3 Zinc Plated.

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.° ±2° .x ±0.1 .x° ±1° .xx ±0.05 .xx°±0.5° .xxx ±0.01

新莱亚电子
XINLAIYA ELECTRONIC CO.,LTD

图名/Title	文件编号/File No.	单位/Units: mm
XY2500F-AS XY2500F-BS	页序/Sheet	
备注/Remark		

WWW.XINLAIYA.COM