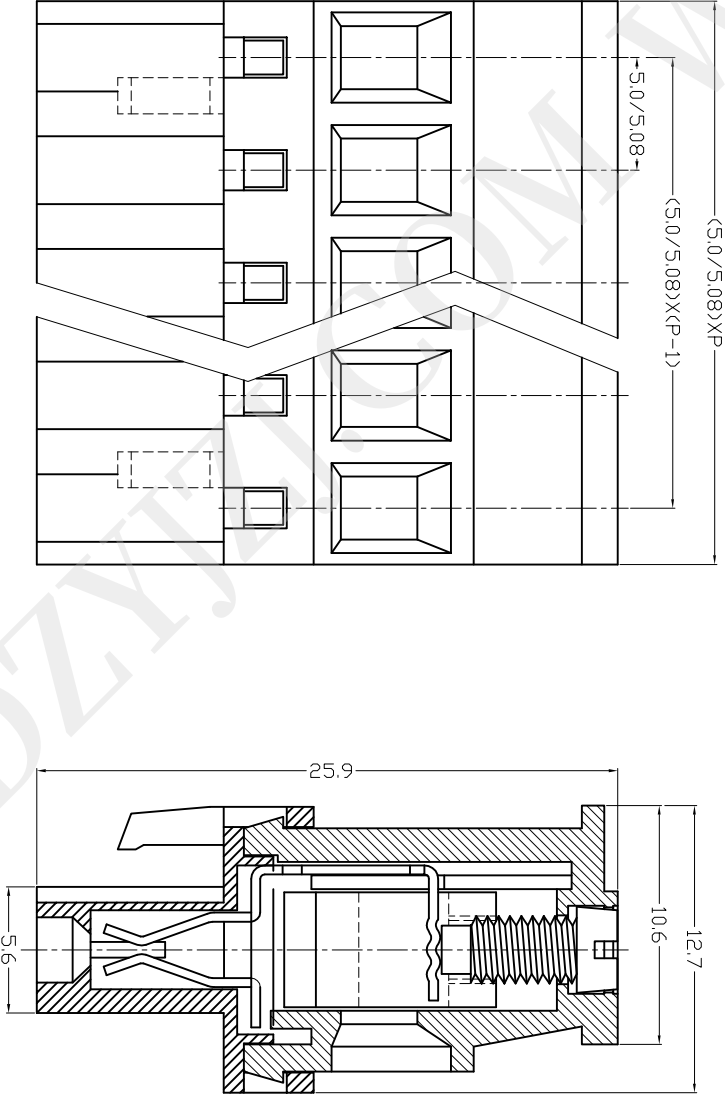


300V 15A 2.5mm² 28-12AWG
Poles: 2-24P
Pitch: 5.0mm (.197") / 5.08mm (.200")

Materials
Housing: PA66 (UL 94V-0)
Clamp: Phosphor Bronze, Nickel Plated.
Wire Cage: Brass, Nickel Plated.
Screw: M3, Steel A3, Zinc Plated.

序号/revmo.	更改记录/revision note	签名/signature	日期/date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/checked by	批准/Approved by	未注公差 General Tolerance	
 新莱亚电子 XINLATA ELECTRONIC CO., LTD		图名/Title	文件编号/File No.	X. ±0.2	X. ±2°
		XY2500FAVR-5.0		.X ±0.1	.X° ±1°
		XY2500FBVR-5.08	页序/Sheet	.XX ±0.05	.XX° ±0.5°
		备注/Remark		.XXX ±0.01	
				单位/units: mm	