
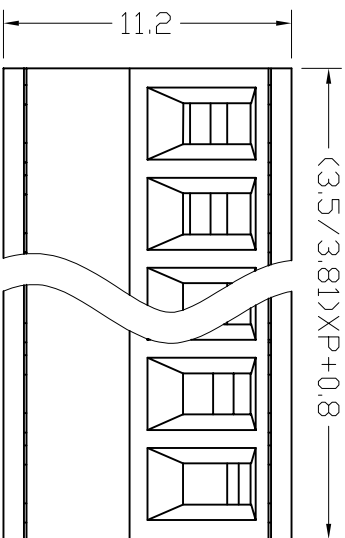
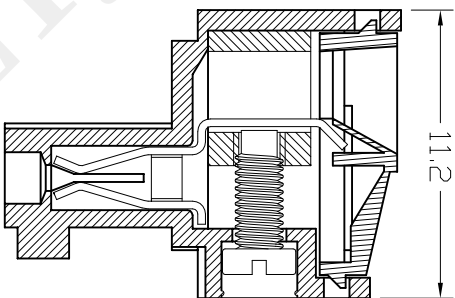
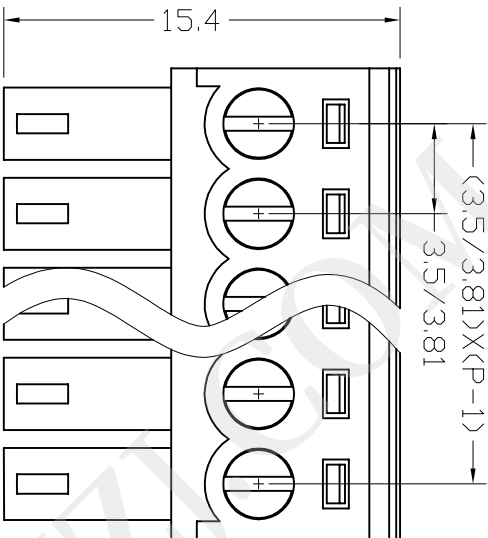




300V 8A 28-16AWG 1.5mm²
Poles: 2-24P
Pitch: 3.5mm (.138"), 3.81mm (.150")
Materials
Housing: PA66 (UL 94V-0)
Clamp: Phosphor Bronze, Nickel Plated
Wire Cage: Brass, Nickel Plated
Screw: M2, Steel (A3), Zinc Plated

设计/Designed by		绘图/Drawing by		审核/Checked by		批准/Approved by		未注公差 General Tolerance	
图名/Title		文件编号/File No.		X.° ±2°		X.° ±1°		.xx ±0.5°	
XY2500FG-3.5		XY2500FC-3.81		.xxx ±0.01		.xxx ±0.01		.xxx ±0.01	
备注/Remark		页序/Sheet		单位/Units: mm					
XLAINVA ELECTRONIC CO., LTD									
新莱亚电子科技									
更改记录/Revision note		签名/Signature		日期/Date					
序号/Rev.No.									