



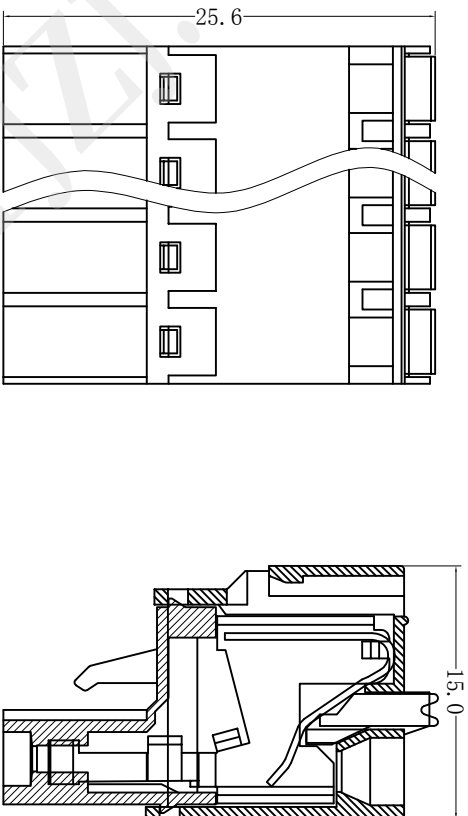

300V 10A 26-12AWG 2.5mm²
Poles: 2P-16P
Pitch: 5.0mm (.197"), 5.08mm (.200")

Materials

Housing: PA66 (UL 94V-0)
Clamp: Phosphor Bronze, Nickel Plated
Clamping: Stainless steel



序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
新莱亚电子 XINLAIYA ELECTRONIC CO., LTD	图名/Title	文件编号/File No.	页序/Sheet	X. ±0.2	X.° ±2°
	XY2500FK/FL			.X ±0.1	.X° ±1°
				.XX ±0.05	.XX° ±0.5°
	备注/Remark			.XXX ±0.01	