
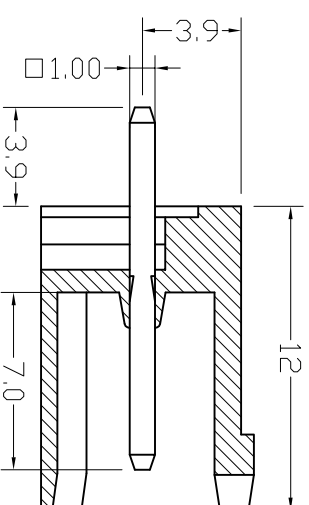


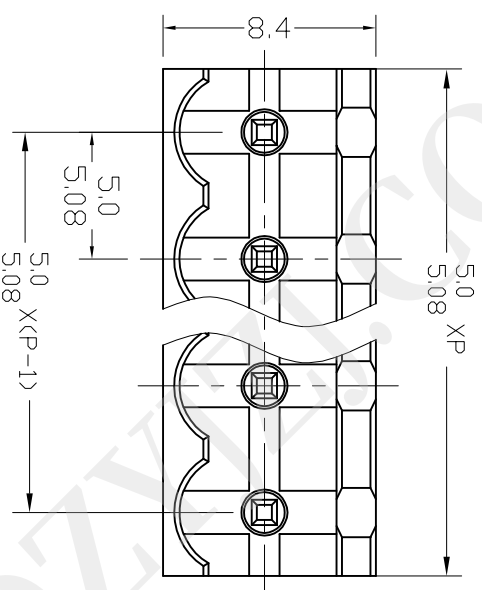

300V 15A

Poles: 2P-24P

Pitch: 5.0mm(.197"),5.08mm(.200")

Materials

Housing: PA66(UL 94V-0)

Solder Pin: Brass, Tin Plated.

序号/Revmo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新莱亚电子 XINLATVA ELECTRONIC CO., LTD		图名/Title	文件编号/File No.	X. ±0.2	X. ±2°
		XY2500V-A		.X ±0.1	.X° ±1°
		XY2500V-C	页序/Sheet	.xx ±0.05	.xx° ±0.5°
备注/Remark				.xxx ±0.01	
				单位/Units: mm	