
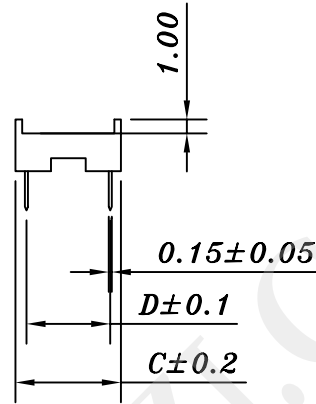


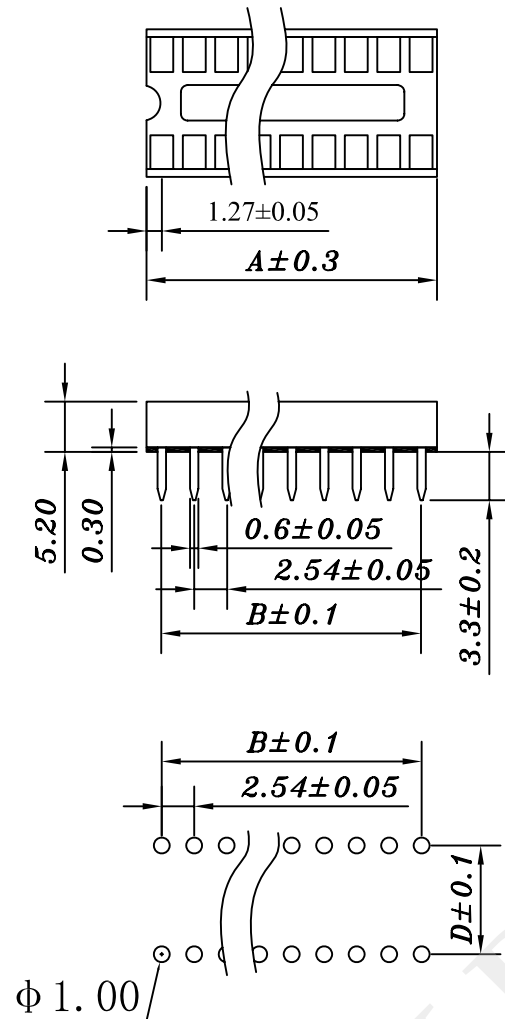

Material

Insulator:P.B.T+30% Glass (UL94V-0)

Contact:Phosphor Bronze or Brass

Contact Plated: Tin

Specification

Current Rating:5A

Insulation Resistance:1000M Ω Min,at 500V DC

Dielectric Withstanding Voltage:1000V AC for 1 Minute

Operating Temperature:-55° C~+105° C

Contact Resistance:20M Ω Max.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
8	10.16	7.62	10.02	7.62
14	17.78	15.24	10.02	7.62
16	20.32	17.78	10.02	7.62
18	22.86	20.32	10.02	7.62
20	25.40	22.86	10.02	7.62
22	27.94	25.40	10.02	7.62
22	27.94	25.40	12.56	10.16
24	30.48	27.94	10.02	7.62
24	30.48	27.94	17.64	15.24
28	35.56	33.02	10.02	7.62
28	35.56	33.02	17.64	15.24
32	40.64	38.10	10.02	7.62
32	40.64	38.10	17.64	15.24
40	50.80	48.26	17.64	15.24
42	53.34	50.80	17.64	15.24
48	60.96	58.42	17.64	15.24
64	81.28	78.74	26.00	22.86

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD					
CHECKED:	DATE:	TITLE: ICS-XP					
DRAWN: LYF	DATE: 2008-04-07	CLIENT P/N		/			
		UNIT	mm	SCALE	free	REV. A	
		FILE NO.		CKM-ICS-00001			

TOLERANCE TABLE	
.0	± 0.20
.00	± 0.10
.000	± 0.05