
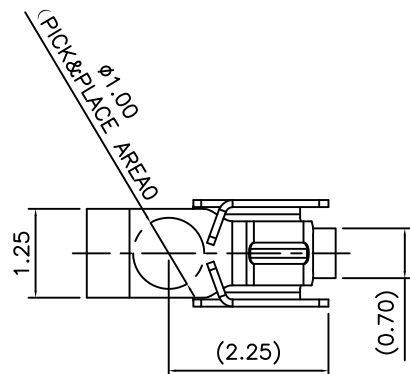

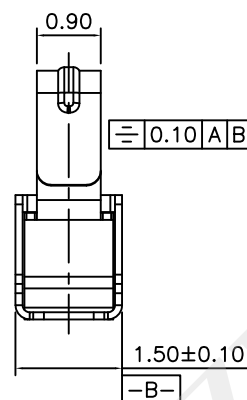



3D View

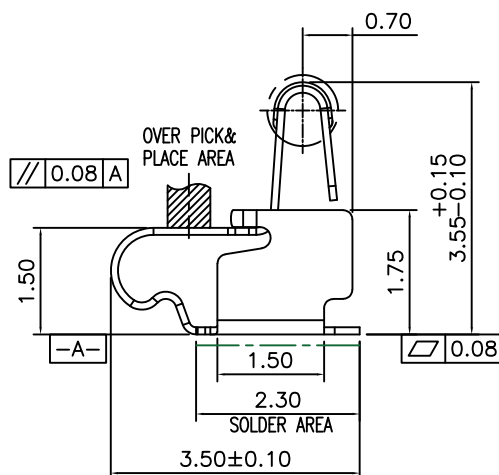


SCALE 2/1

NOTES

- (1) MATERIAL: SUS-304 THICKNESS=0.10mm
- (2) PRODUCT SPECIFICATIONS:
 - 2-1: RATED CURRENT: 1.0A
 - 2-2: VOLTAGE RATING: 1.50V
 - 2-3: CONTACT RESISTANCE: 80mΩ/MAX
 - 2-4: WELDING THRUST: ≥ 3KG
 - 2-5: OPERATING TEMPERATURE: -40°C~+85°C
 - 2-6: DURABILITY: 1500 CYCLES
- (3): SALT SPRAY: 24 HOURS
- (4): REQUIREMENTS
 - 4-1: TERMINAL TO EAT FULL TIN, NOT PEELING WELDING OBVIOUS COLOR AND OTHER ADVERSE
 - 4-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS

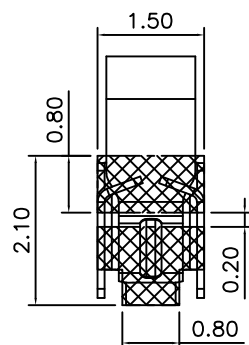

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05 (焊盘推荐图)




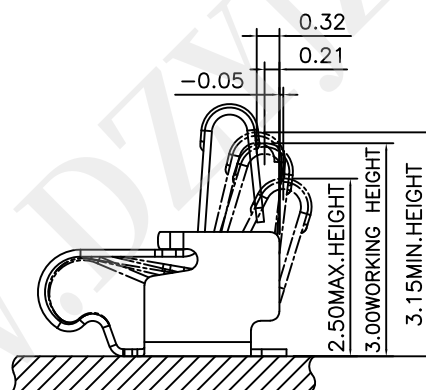


STATED AT COMPRESSION
(FOR REFERENCE ONLY)





深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L3.50*W1.50*H3.50
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT351535AL
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2412191548
			SHEET NO. 1 OF 1

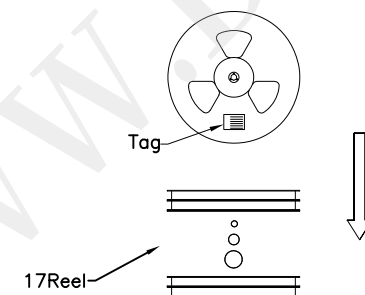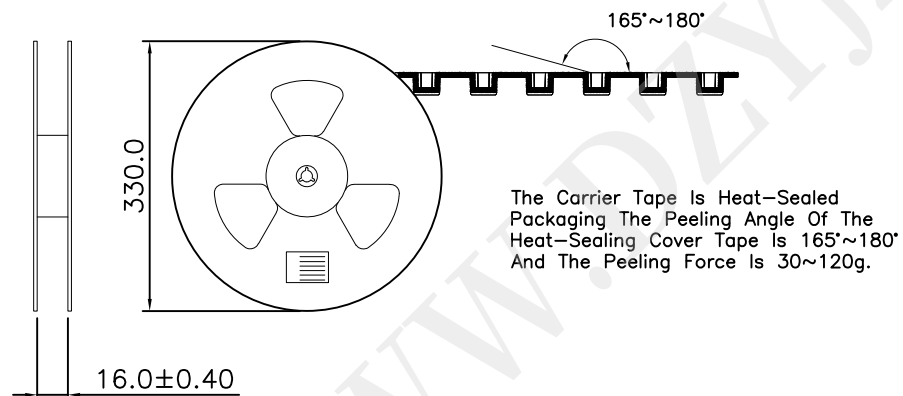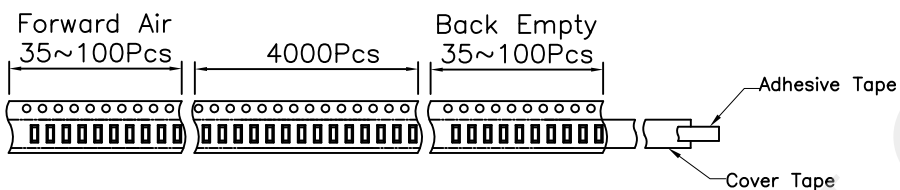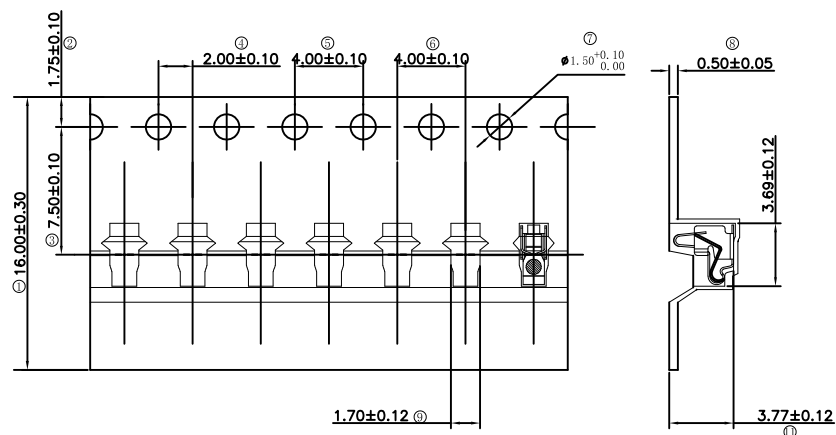

Carton Size
290*330*4 K3K

Carton Size
345*345*360 K=K



深圳市华宇创精密电子有限公司					
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
CHECKED BY: 马跃		DATE : 2014-02-23	PART NO.		
APPROVED BY: 邱敏		DATE : 2014-02-23	MOLD NO.		
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO:		
			SHEET NO.	1 OF 1	